

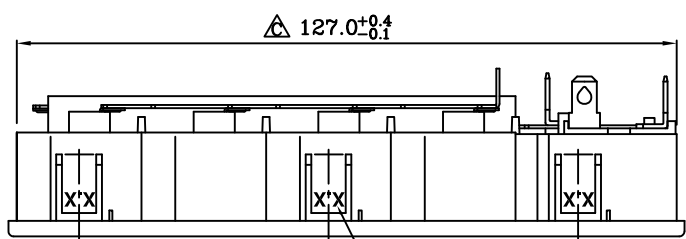


PANEL CUT-OUT



XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5

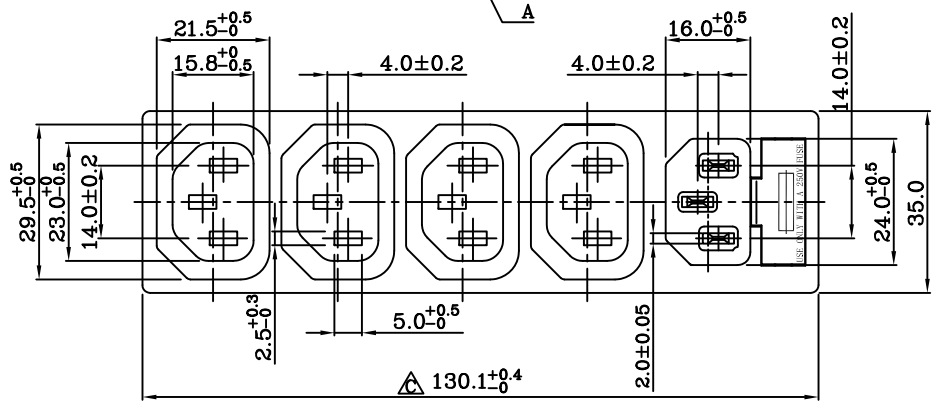

- SPECIFICATION:
1. Insulation Resistance: Over 100MΩ at 500V DC.
  2. Dielectric strength: 2000V AC 1 Minute.
  3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 10A 250V	
Mark	Safety Regulation
	CCC
	VDE
	ENEC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS

DRAWING:C:DG\NEW-R\T\3014\G24\R-3014G24 (07) XX. DWG

**R** 富灣股份有限公司  
 RICH BAY COMPANY LTD.  
 台北縣樹林市東興街57號  
 NO. 57, Tung Hsing St.,Shu-Lin Town,  
 Taipei Hsien, Taiwan, R. O. C.  
 TEL:886-2-86867781~4 FAX:886-2-86867780  
 http://www.richbay.com.tw

DRAWN BY 	UNIT	UNIT QTY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3	PRODUCT NO.	R-3014G24 (07) XX	REV
	mm	1	2:3				
APPROVED BY 	ID NO	151204A15	DESCRIPTION	INTERIM NO.	NEW NO.		C