



78L05ACZ - 78L12ACZ

Positive Voltage Regulators

GENERAL DESCRIPTION

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 100 mA of output current. The internal limiting and thermal-shutdown features of these regulators them essentially immune to overload.

Compliance to **RoHS**.

FEATURES

- 3-Terminal Regulators
- Output Current up to 100 mA
- No External Components
- Short circuit Protection
- Internal Thermal-Overload Protection
- With TO92 package

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_I	Input Voltage DC	$V_o = 5 \text{ V}$	30	V
		$V_o = 12 \text{ V}$	35	
I_o	Output Current		100	mA
P_D	Power Dissipation		Internally Limited	
T_{OP}	Operating Junction Temperature		0° to 125	°C
T_{STG}	Storage Temperature		-40° to 150	°C

THERMAL DATA

Symbol	Ratings	Value	Unit
R_{thJA}	From Junction to Free-Air Thermal Resistance	200	°C/W



78L05ACZ - 78L12ACZ

ELECTRICAL CHARACTERISTICS OF 78L05ACZ

$V_i = 10 \text{ V}$; $I_o = 40 \text{ mA}$; $T_c = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT	
V_o	$T_c = 25^\circ\text{C}$	4.8	5	5.2	V	
	$V_i = 7 \text{ V} \text{ to } 20 \text{ V}$	4.75	5	5.25		
	$I_o = 1 \text{ mA} \text{ to } 40 \text{ mA}$	4.75	5	5.25		
ΔV_o	$I_o = 1 \text{ mA} \text{ to } 70 \text{ mA}$	-	-	150	mV	
	$8 \text{ V} \leq V_i \leq 20 \text{ V}$	-	-	100		
ΔV_o	$I_o = 1 \text{ mA} \text{ to } 100 \text{ mA}$	-	-	60	mV	
	$I_o = 1 \text{ mA} \text{ to } 40 \text{ mA}$	-	-	30		
I_B	Quiescent Current	-	-	6	mA	
ΔI_{B1}	Quiescent Current Change	$8 \text{ V} \leq V_i \leq 20 \text{ V}$	-	-	1.5	mA
ΔI_{B2}	Quiescent Current Change	$I_o = 1 \text{ mA} \text{ to } 40 \text{ mA}$	-	-	0.1	mA

ELECTRICAL CHARACTERISTICS OF 78L12ACZ

$V_i = 19 \text{ V}$; $I_o = 40 \text{ mA}$; $T_c = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT	
V_o	$T_c = 25^\circ\text{C}$	11.5	12	12.5	V	
	$V_i = 14.5 \text{ V} \text{ to } 27 \text{ V}$	11.4	12	12.6		
	$I_o = 1 \text{ mA} \text{ to } 40 \text{ mA}$	11.4	12	12.6		
ΔV_o	$I_o = 1 \text{ mA} \text{ to } 70 \text{ mA}$	-	-	250	mV	
	$14.7 \text{ V} \leq V_i \leq 27 \text{ V}$	-	-	200		
ΔV_o	$I_o = 1 \text{ mA} \leq I_o \leq 100 \text{ mA}$	-	-	100	mV	
	$I_o = 1 \text{ mA} \leq I_o \leq 40 \text{ mA}$	-	-	50		
I_B	Quiescent Current	-	-	6.5	mA	
ΔI_{B1}	Quiescent Current Change	$16 \text{ V} \leq V_i \leq 27 \text{ V}$	-	-	1.5	mA
ΔI_{B2}	Quiescent Current Change	$1 \text{ mA} \leq I_o \leq 40 \text{ mA}$	-	-	0.1	mA




C O M S E T
S E M I
C O N D U C T O R S

78L05ACZ - 78L12ACZ

MECHANICAL DATA CASE TO92 REGULATOR

Pin 1 :	Input	
Pin 2 :	GND	
Pin 3 :	Output	

DIMENSIONS		
mm	Min	Max
A	4,45	4,95
B	4,32	4,95
C	12,70	15,49
D	0,41	0,56
E	3,43	3,43
F	2,41	2,67
G	1,14	1,40
H	3,30	3,94
I	2,38	2,42
J	2,38	2,42

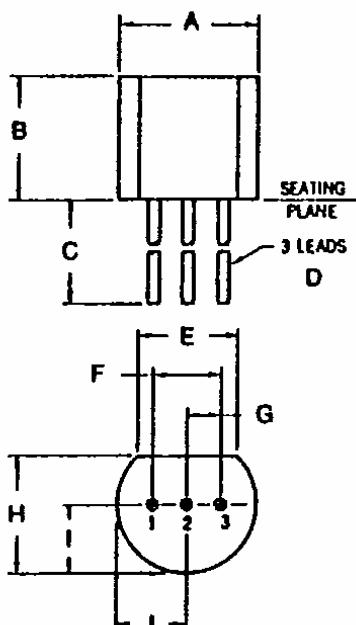

Revised June 2012

Information furnished is believed to be accurate and reliable. However, CS assumes no responsibility for the consequences of use of such information nor for errors that could appear.

Data are subject to change without notice.