

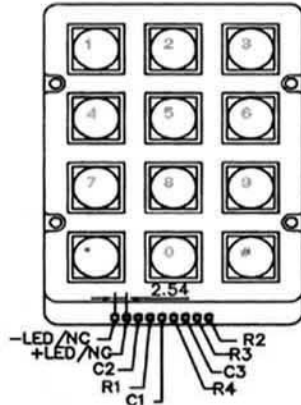
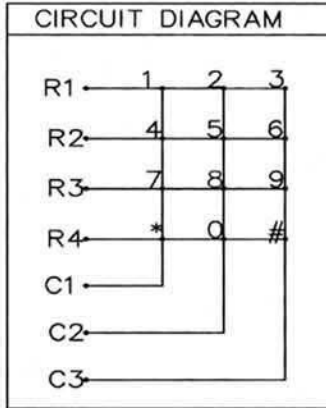


### GENERAL SPECIFICATION

- Contact rating : 20mA, 24VDC
- LED Forward Current : 240mA
- LED Contact rating :  $V_{max}=2.3V, V_{nom}=1.7V$
- Contact resistance : 200 ohm max
- Life : 2,000,000 cycles per key
- Operating Temperature :  $-20^{\circ}C$  to  $+60^{\circ}C$
- Storage Temperature :  $-40^{\circ}C$  to  $+65^{\circ}C$

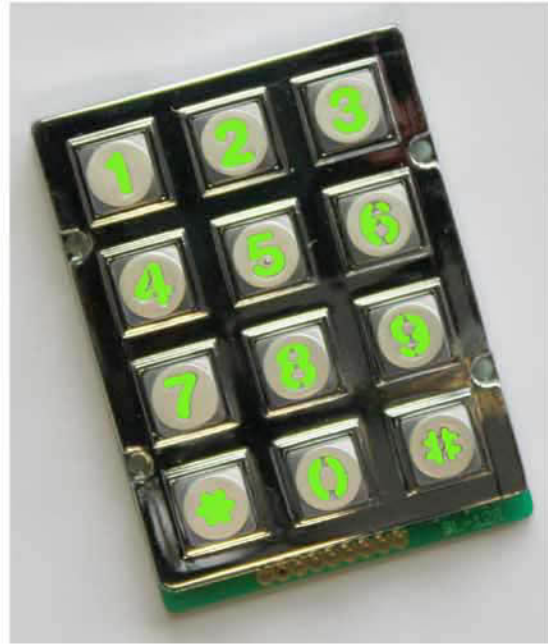

AK-207-N-SSL-WP-MM-GR-ESD

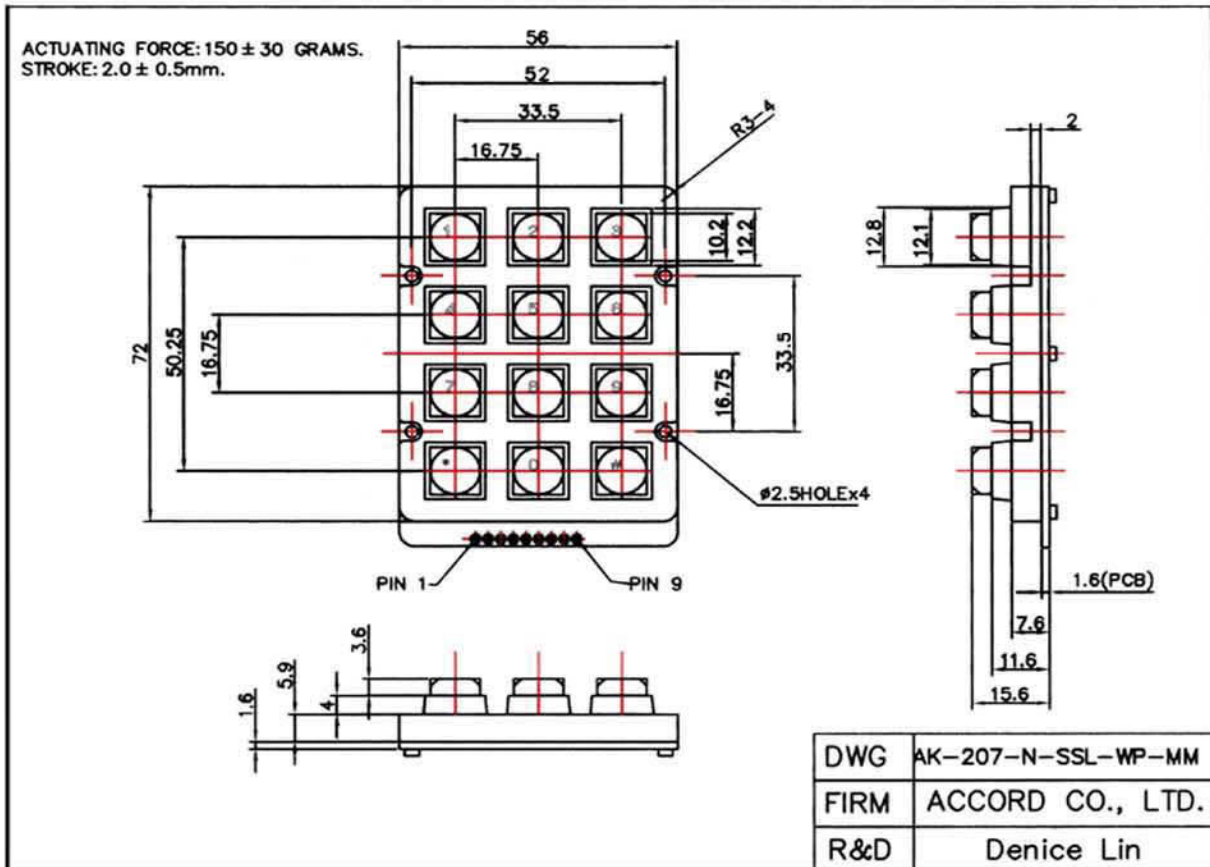

### ACCORD CO., LTD.

8th Fl., No. 398, Jen Ai Road, Sec 4, Taipei, Taiwan.

Tel : 886-2-2704-4503

Fax : 886-2-2703-6358

E-mail : [accord@accordia.com.tw](mailto:accord@accordia.com.tw)

<http://www.accordia.com.tw>