
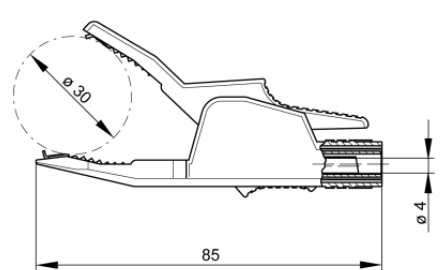


## Crocodile clips

### AK 2 B 2540 I



<b>Product</b>	<b>AK 2 B 2540 I</b>
description	Contact-protected, high-strength, wide-opening alligator clip. Clamping range up to 30mm bolt diameter. Solid wire clip, U-shaped and fine wire section. Nickel-plated brass connecting socket, pluggable with 4mm safety measuring leads.
article-no. / *colour	9724051xx  00 black    01 red    02 blue    03 yellow    04 green    88 yellow green <span style="border: 1px solid black; padding: 2px;">Ni</span>
<b>drawing</b>	
<b>technical data</b>	
connection	unsprung socket 4 mm
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current <sup>(1)</sup> (consider derating curve)	32 A
material socket	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010 <sup>(2)</sup>	-30 °C to +90 °C
inflammability class acc. to UL 94	HB
clamping range	30 mm

4 mm safety system

standard	IEC 61010
----------	-----------

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 13.05.2016