

# COM3M

4x4 Non Waterproof Matrix Keypad with 16 Alpha-numeric Plastic Keys


## Specifications

- Contact Rating : 20mA,24VDC
- Contact Resistance : 200 ohm max
- Life : 1,000,000 cycles per key
- Operating Temperature : -20~+60°C

Storage Temperature : -40~+65°C




CIRCUIT DIAGRAM

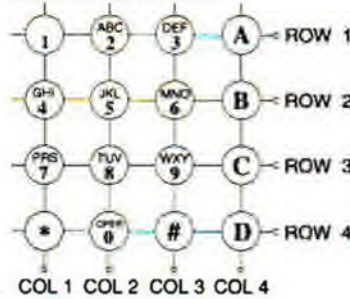

AK-1604

OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 1
2	COL 2
3	COL 3
4	COL 4
5	ROW 1
6	ROW 2
7	ROW 3
8	ROW 4

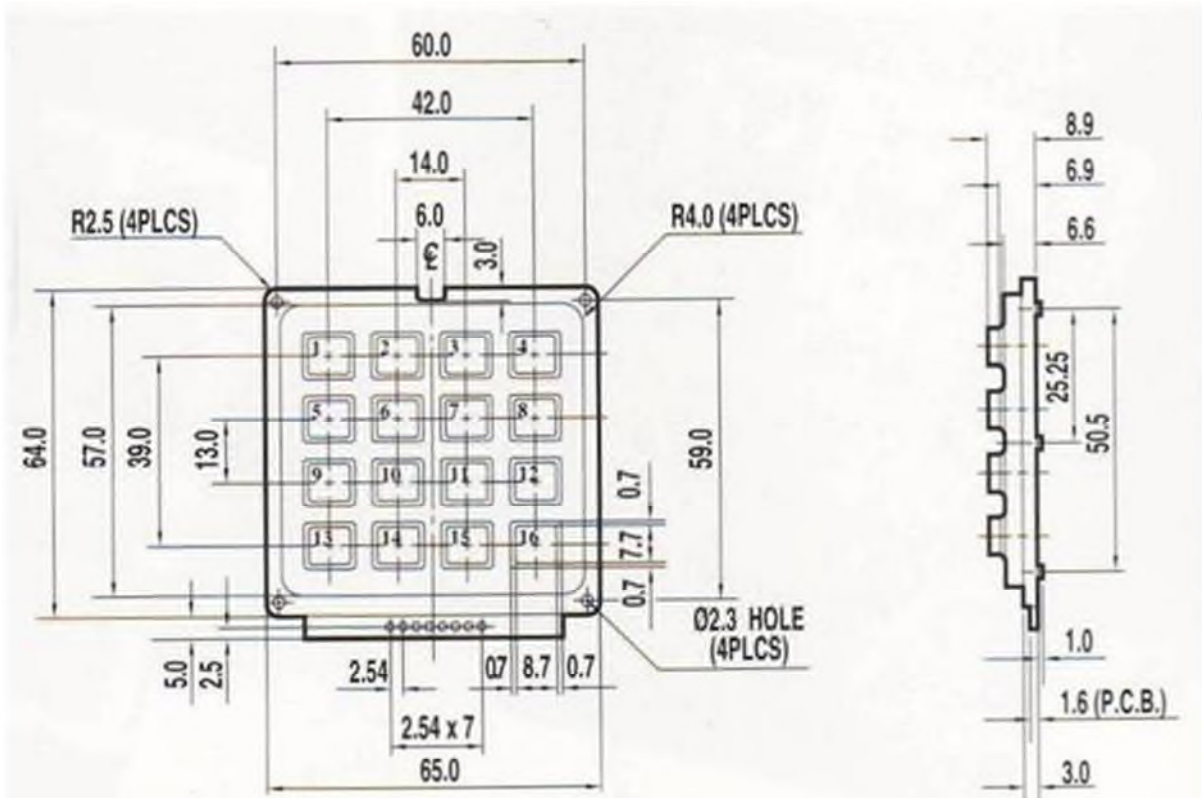

ACTUATING FORCE:  $100 \pm 30$  GRAMS.  
STROKE:  $1.5 \pm 0.5$  mm.