

THE DATA LINE SERIES

12-00185

rev2

Intercom Protection Unit

Features

- Easy installation
- Screw terminations

Applications

- Intercom systems




*Specifications subject to change without prior notice due to continuous improvements


Specifications

Power Surge Protection

Max. Operating Voltage	15VDC
Max. Discharge Current (differential mode)	500A (8/20us)
Max. Discharge Current (common mode)	10kA
Residual Voltage (differential mode)	<43ns
Response Time	<25ns
Connectors	Screw on pluggable

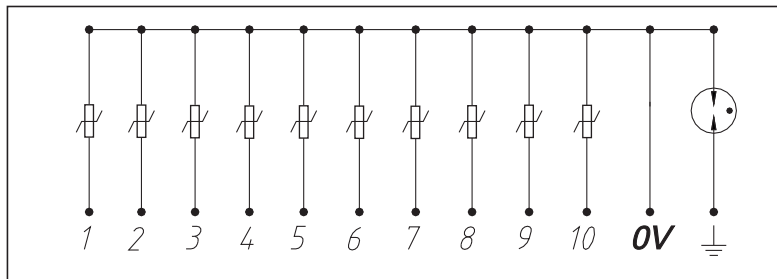

Dimensions

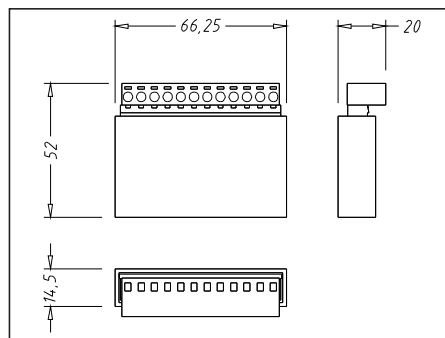

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

385 Roan Crescent Corporate Park North, Old Pta Road,

Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: info@clearline.co.za

www.clearline.co.za

