

THE TELECOMLINE SERIES

12-00196

KP2 High Speed

Features

- Krone LSA plus compatible
- Low insertion loss
- Low crosstalk
- Easy installation
- 10Mbits/sec operation
- Label Holder




A high speed plug-in card to interface with standard Krone LSA plus disconnect blocks. Offering minimal insertion loss and near end crosstalk, these cards are ideal for large structured wiring installations up to 10Mbits/sec. Each card protects five 4 wire circuits. A new earthing system ensures a high degree of protection.


Specifications

Number of pairs	10
Max. operating voltage	130VDC
Max. operating current	0.3A
Max. discharge current differential mode	5kA
Max. discharge current common mode	10kA
Residual voltage at 5kA differential mode	100V
Residual voltage at 5kA common mode	150V
Series resistance (per leg)	3.3Ω
Temperature range	0°C to +70°C
Failsafe fitted	Yes
Data speed	0.1dB 2MHz

Dimensions

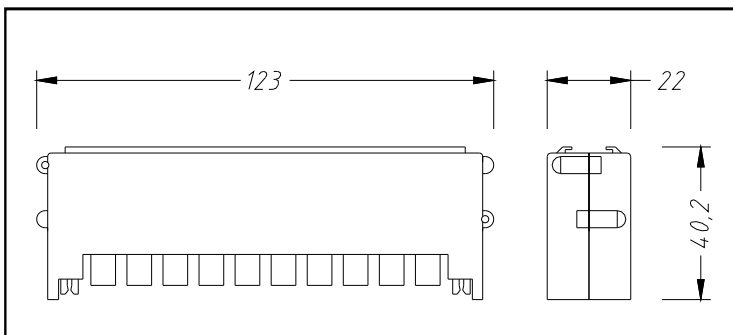

Circuit diagram

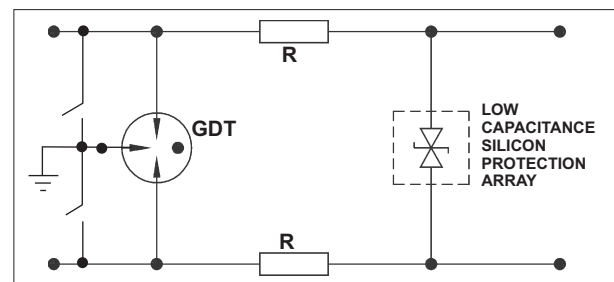

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
385 Roan Crescent Corporate Park North, Old Pta Road,
Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

