

# THE DATALINE SERIES

## HD Coaxial CCTV Protection

### Features

- Easy installation
- Low insertion loss
- Failsafe protection
- Compact design




This Rack has 8 units for HD coaxial protection for high speed data transmission lines. Suitable for HD CCTV Systems and Backward compatible. These devices exhibit negligible insertion loss and are fitted in-line at the equipment connection.

The 19" 1U Rack protection unit fits into a standard 19" cabinet.

Specifications	
Max operating voltage	1V p-p
Max operating current	0.3A
Max discharge current (Differential mode)	2kA
Max discharge current (Common mode)	2kA
Residual voltage	< 2.5V
Insertion loss at 10MHz	0.8dB
Connectors	BNC F-F
Impedance	75ohm unbalanced
Range	Up to 100m
Temperature range	- 10°C to 70°C
Application	HD CCTV Composite

### Dimensions

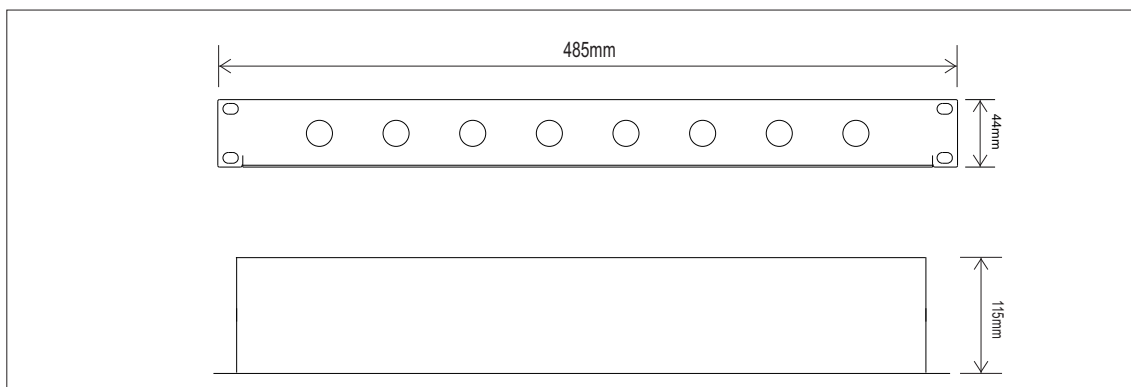

### Designed and Manufactured by:

**Clearline Protection Systems (Pty) Ltd**

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: [info@clearline.co.za](mailto:info@clearline.co.za)

[www.clearline.co.za](http://www.clearline.co.za)

