

ISDN Protection

Features


- Fully graded protection
- Compact design
- High discharge current capability
- Easy installation

The BT version is suitable for ISDN applications.



Specification	
ISDN/BT	
No of pairs	2
Input connector	Screw terminals
Output connector	BT 6 way
Max operating voltage	+/- 100V dc
Max discharge current (Differential mode)	10kA
Max discharge current (Common mode)	10kA
Residual voltage (Differential mode)	Approx. 10V
Residual voltage (Common mode)	Approx. 1000V
Data speed	3Mbits/120Ω
Temperature range	-20 C to +70 C

Dimension

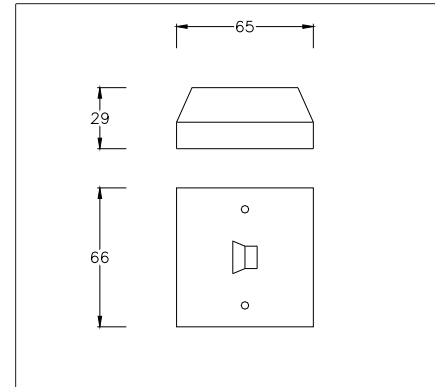

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
 385 Roan Crescent Corporate Park North, Old Pta Road,
 Midrand, South Africa
 P.O. Box 5985, Halfway House, 1685
 Tel: +27 (0) 11 848-1100
 Fax: +27 (0) 11 314-3880
 E-mail: info@clearline.co.za