

THE DUOLINE SERIES

Television Protection System (Slim TV - Dual Sat. Protector)

Features

- Plug-and-Play concept
- High surge capability
- Fire hazard protection
- Protection indication lamps
- Easy Installation
- Slim line Compact

Clearline protects your Television against lightning and surges without additional earthing. The protection is capable of blocking severe lightning and power surges. Clearline incorporates a fast overload device which will be activated in extreme conditions. Functional indication lamps display the protection status of the unit. Clearline's unique built-in thermal protection devices eliminates fire hazards.

12-00727




| Specifications | |
|---|---|
| Power Module | |
| Nom. input voltage | 230VAC 50Hz |
| Max continuous voltage | 250V 50Hz |
| Max continuous current (Thermal overload protected) | 10A |
| Max discharge current at ismax (8/20) | 8kA, L-N, L-E, N-E |
| Response time | <25ns |
| Indication LED | 1. Protected 2. Faulty when lit 3. Earth when lit |

Included in Kit:

- 1 x TV cable
- 2 x Satellite cables

| Specifications | | |
|---------------------------------------|-----------------|-----------------|
| TV / Satellite Modules | TV | Satellite |
| Max discharge current at ismax (8/20) | 10kA | 10kA |
| Residual voltage at ismax | <100V, L-L, L-E | <100V, L-L, L-E |
| Frequency response | <100ns | <100ns |
| Useable frequency | 800MHz | 3GHz |

Dimensions

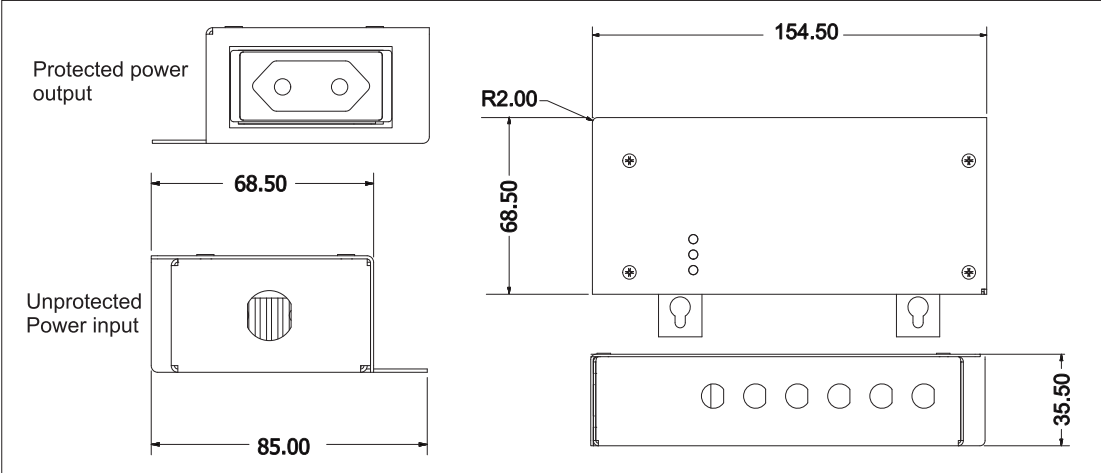

Designed and Manufactured by:
Clearline Protection Systems (Pty) Ltd
 385 Roan Crescent Corporate Park North, Old Pta Road,
 Midrand, South Africa
 P.O. Box 5985, Halfway House, 1685
 Tel: +27 (0) 11 848-1100
 Fax: +27 (0) 11 314-3880
 E-mail: info@clearline.co.za
 www.clearline.co.za

