

## Combination arrester V50, 1-pole + NPE 280 V




Lightning current combination arrester, type 1+2

- For lightning current equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity of 12.5 kA (10/350) per pole and up to 50 kA (10/350) in total
- Modular, plug-in arrester with cut-off unit and visual status display
- Locking mechanism with vibration protection and voltage keying
- Plastic to UL 94 V-0
- The remote signalling (FS) variants have a potential-free changeover contact for remote signalling


Application: Lightning current equipotential bonding for buildings of class III and IV.

Type	Highest continuous voltage AC V	Pole version	Protection rating	Pack. pcs	Weight kg/100 pcs.	Item No.
V50-1+NPE-280	280	1+N/PE	IP20	1	30,300	5093522

### Dimensions

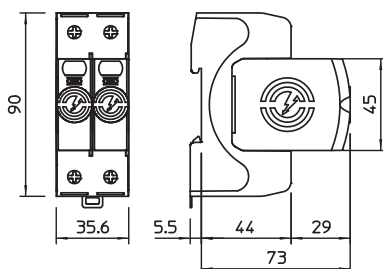

### Connection options



#### V50-1+NPE-280

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
SPD to UL 1449	Type 4
Nominal voltage AC (50 / 60 Hz) V	$U_n$ 230
Maximum continuous voltage AC V	$U_c$ 280
Nominal discharge current (8/20 $\mu$ s) kA	$I_{n/L-N}$ 30
Maximum discharge current (8/20 $\mu$ s) kA	$I_{max}$ 50
Lightning surge current (10/350 $\mu$ s) kA	$I_{imp}$ 12,5
Total discharge current (10/350) kA	$I_{total}$ 25
Arrester surge current (8/20 $\mu$ s) [total] kA	$I_{total}$ 80
Protection level [L-N] kV	$U_p$ 1,3
Combined voltage protection level [L-PE] kV	$U_p / L-PE$ 2,5
Residual voltage [L-N] @ 1 kA kV	$U_{res}$ 0,7
Residual voltage [L-N] @ 5 kA kV	$U_{res}$ 0,8
Max. mains-side overcurrent protection	160 A gL/gG
Short-circuit withstand for max. mains-side overcurrent protection	50 kA eff
Operating temperature range °C	$T_u$ -40+80
Protection rating	IP20
Approvals	KEMA
Cable cross-section, flexible (fine-wire) mm <sup>2</sup>	1,5-35
Rigid cable cross-section (single wire/multiwire) mm <sup>2</sup>	1,5-35
Cable cross-section, flexible (fine-wire) AWG	16-2
Rigid cable cross-section (single wire/multiwire) AWG	16-2