

CS-TB-EU

8CH 1080p PoE NVR with 4 1080p Weatherproof PoE Bullet IP Cameras




Component









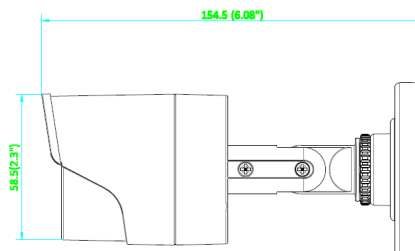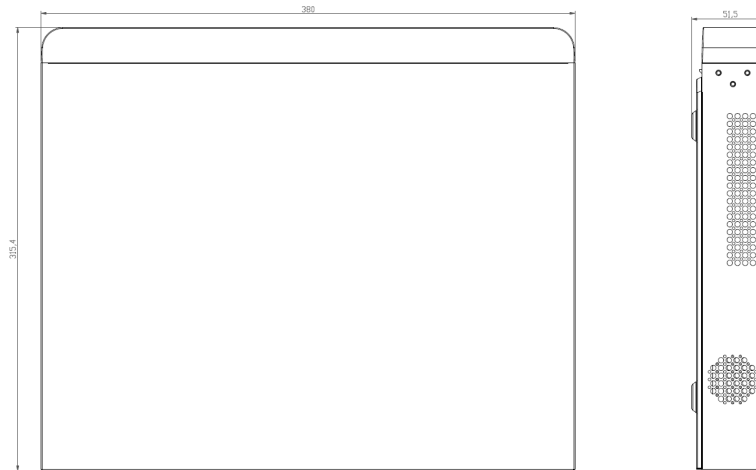



CS-X4-108P-EU(2TB HDD)

CS-C3U-22ER(4mm)

Dimension



Number	Item	Quantity	Unit	Item image (For only reference)	
DVR	1	8 CH NVR Model: CS-X4-108P-EU (2TB)	1	PCS	
	2	HDMI Cable (19P/M to 19P/M,200cm,Black)	1	PCS	
	3	NVR Power Cable (European Standard)	1	PCS	
	4	NVR Power Cable (British Standard)	1	PCS	
	5	Ethernet Cable	1	PCS	
	6	USB Mouse	1	PCS	

Camera	6	Camera Model: CS-C3U-22R (4mm)	4	PCS	
	7	18m(60ft) Network Cable x 4	4	PCS	
	8	Mounting Screws and Plugs (3_PA4x25-SUS)	4	PCS	
	9	Mounting Templates	4	PCS	
	Accessories	14	Warning Decal (Europe)	4	PCS
15		Quick Start Guide	1	PCS	/
16		Installation Guide	1	PCS	/
17		Warranty Card	1	PCS	/

CS-X4-108P-EU

8CH 1080p PoE NVR with 2TB HDD

Introduction

The CS-X4-108P NVR (Network Video Recorder) connects to cameras through network cables. The cables both provide power and transmit bidirectional data. Once the cameras are connected, the plug-and-play feature enables the recorder to start displaying and recording the video. Most tasks, from the initial setup to daily operation, can be accomplished through our app. The system comes with a built-in WD Purple hard drive, the first choice for professional surveillance systems.



Main Features



Simultaneous HDMI and VGA outputs at up to 1920×1080 resolution



Supports live view, storage, and playback of the connected camera



Supports synchronous playback and reverse playback for multi-channel



1 self-adaptive 10M/100M/1000M network interface is provided



8 independent PoE networks



Supports smart search




Built-in 2-TB HDD



Free EZVIZ Cloud P2P

Physical Interfaces:

- 1 Power Supply
- 2 Audio In
- 3 HDMI Interface
- 4 LAN Network Interface
- 5 Audio Out
- 6 VGA Interface
- 7 USB Interface
- 8 Ground
- 9 Power Switch
- 10 Network Interfaces with POE Function

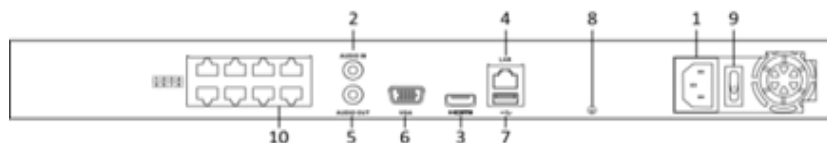

Specifications

Model	CS-X4-108P-EU	
Video/Audio input	IP video input	8-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	Incoming bandwidth	80Mbps
	Outgoing bandwidth	80Mbps
Video/Audio output	Recording resolution	1080P/720P/ 4CIF
	Frame rate	Main stream: 60 fps (N)
		Sub-stream: 60 fps (N)
	HDMI/VGA output	1-ch, resolution: 1920 × 1080 /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)	
Decoding	Live view / Playback resolution	1080P /720P/ VGA/4CIF/CIF/QVGA
	Capability	8-ch@720P, 4-ch@1080P
Hard disk	Capacity	Built-in 2-TB HDD
External interface	Network interface	1 RJ-45 10 /1000 Mbps self-adaptive Ethernet interface
	USB interface	1 × USB 2.0 and 1 × USB 3.0
PoE	Interface	8 independent 100 Mbps PoE network interfaces
	Max. Power	120W
	Supported standard	AF and AT
General	Power supply	12V DC
	Consumption (without PoE)	≤15W
	Working temperature	+14 °F~ + 131 °F(-10 °C ~ +55 °C)
	Working humidity	10 % ~ 90 %
	Chassis	380mm 1U chassis
	Dimensions (W × D × H)	15.0 × 12.6 × 1.9 inch (380 × 320 × 48mm)
	Weight	6.6 lb (3kg)

CS-C3U-22ER

1080p Weatherproof PoE Bullet IP Camera



Main Features



Up to 2 megapixel (1920 × 1080) resolution



High-performance and long service life Infrared LED, up to 100 feet IR range



POE (Power over Ethernet)



IP66 weatherproof

Specifications

Model	CS-C3U-22ER
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.028Lux @ (F2.0, AGC ON), 0 lux with IR
Shutter Time	1/3s to 1/100,000 s
Lens	4mm
	View Angle: 85°(horizontal)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR

Image	
Max. Resolution	1920 × 1080
Frame Rate	50Hz: 25fps(1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720) 60Hz: 30fps(1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720)
Backlight compensation	Yes, zone optional
Network	
Network Storage	Only support EZVIZ NVR
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet interface
Reset Button	Yes
General	
Working Temperature/ Humidity	-22 °F to 140 °F (-30 °C to 60 °C) Humidity 95% or less (non-condensing)
Power Supply	PoE (802.3af)
Power Consumption	5W MAX (Max. 7 W as IR cut filter on)
Weather Proof Ratings	IP66
IR Range	Up to 100 feet (30m)
Dimension	Φ2.75" ×6.20"(Φ70×157.4 mm)
Weight	0.84 lb (380 g)