


Type 2 PV SPD

SLP40-PV600/2 SLP40-PV600/2S

Pluggable modular multi-pole SPD type 2 lightning current surge arrester for use in photovoltaic systems

- With remote signaling contact for monitoring device (floating changeover contact) (S)
- For installation in the DC circuits of solar photovoltaic systems, string box, inverter
- Mode of Protection: (DC+) - PE, (DC-) - PE
- EU Category: Type 2
- Protective Elements: High Energy MOV

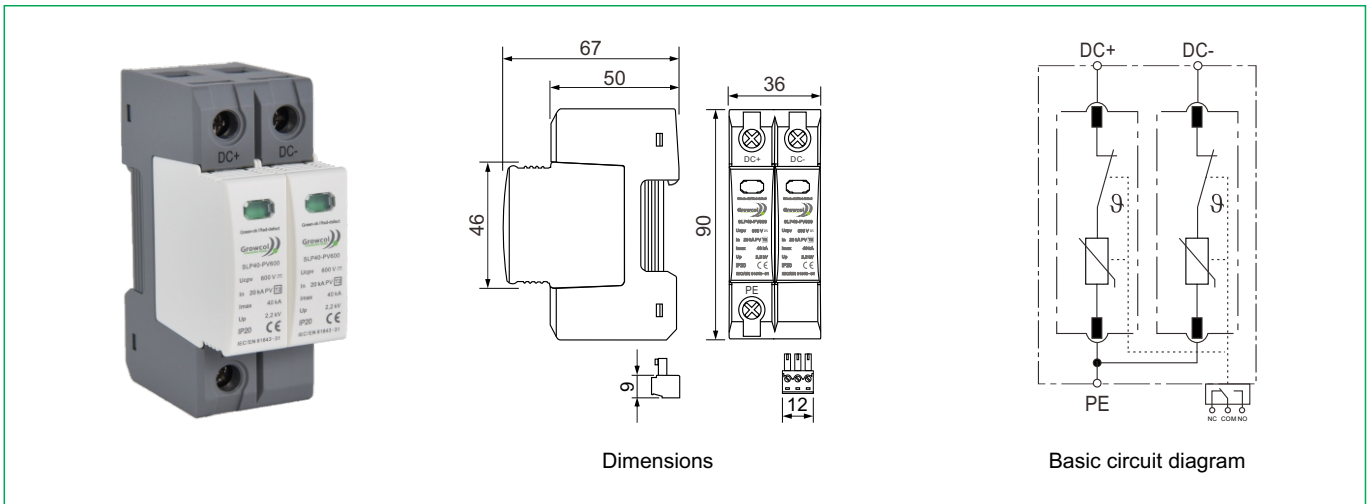

Type	SLP40-PV600/2	SLP40-PV600/2S
SPD according to EN 61643-31 / IEC 61643-31	type 2 / class II	type 2 / class II
Nominal d.c. voltage	U_n 500 V	500 V
Max. continuous operating d.c. voltage	U_c 600 V	600 V
Nominal discharge current (8/20 μ s)	I_n 20 kA	20 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA	40 kA
Voltage protection level	U_p 2,2 kV	2,2 kV
Residual current - Leakage current at U_c	I_{PE} ≤ 0.5 mA	≤ 0.5 mA
Max. Load current if connection series	I_L 20 A	20 A
Response time	t_A 25 ns	25 ns
Range of operating temperatures	T_u -40/+70°C	-40/+70°C
Operating state / fault indication	green / red	green / red
Number of ports	1	1
Cross-sectional area (min.)	1.5 mm ² solid /flexible	1.5 mm ² solid /flexible
Cross-sectional area (max.)	35 mm ² stranded / 25 mm ² flexible	35 mm ² stranded / 25 mm ² flexible
For mounting on	35 mm DIN rail acc. to EN 60715	35 mm DIN rail acc. to EN 60715
Enclosure material	thermoplastic	thermoplastic
Place of installation	indoor installation	indoor installation
Degree of protection	IP 20	IP 20
Capacity	2 module(s), DIN 43880	2 module(s), DIN 43880
Approvals	CE	CE
Type of remote signalling contact	-	changeover contact
a.c. switching capacity	-	250V / 0.5A
d.c. switching capacity	-	250V / 0.1 A; 125 V / 0.2A; 75 V / 0.5A
Cross-sectional area for remote signalling terminals	-	max. 1.5 mm ² solid / flexible