


(Scale: 1.2: 1)

Cell(电芯):	LP103450	Date code(喷码):	Inner controlling standard(内控标准)		
Battery Specification (电池参数)	Min Capacity 最低容量 (mAh) (0.2C,25±3°C) *Single battery capacity (单体电池容量)	1750	*PCM protection (保护板参数)	Overcurrent Detection(A) (过流值)	2-6
	Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) *Single battery capacity (单体电池容量)	1850		Overcharge Detection Voltage(V) (过充保护电压)	4.28±0.05
	Normal Voltage 标称电压 (V)	3.7		Overdischarge Detection Voltage(V) (过放保护电压)	2.3±0.1
	Internal impedance 内阻 (≦) (mΩ,AC 1KHZ)	170		Charge Temp.充电温度 (°C)	0-45
Ambient Conditions (工作环境)		Discharge Temp.放电温度 (°C)		-20-60	
		Humidity(湿度)		65±20%	

Remark(备注):  
 1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
 2. Rohs compliant(严格按照ROHS要求生产).

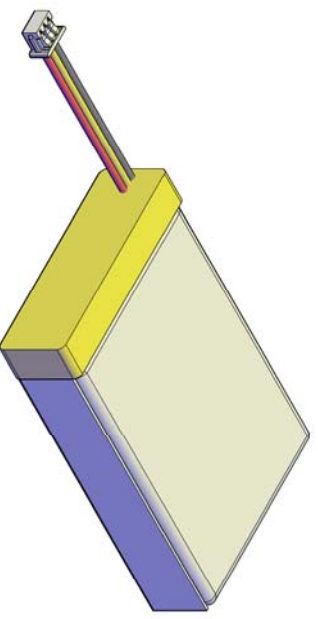

		Drawn:	Moyongdi	Revise No.:	E4-2009
		Checked 1:	Rosa	Projection:	
<b>EEMB BATTERY</b>		Checked 2:	Keyan	Page:	1/1
		Approved:		Scale:	1:1
Title	LP103450-PCM-NTC-LD/	Draw Date:	2010/04/16	Unit:	mm
File NO.	A03069				