
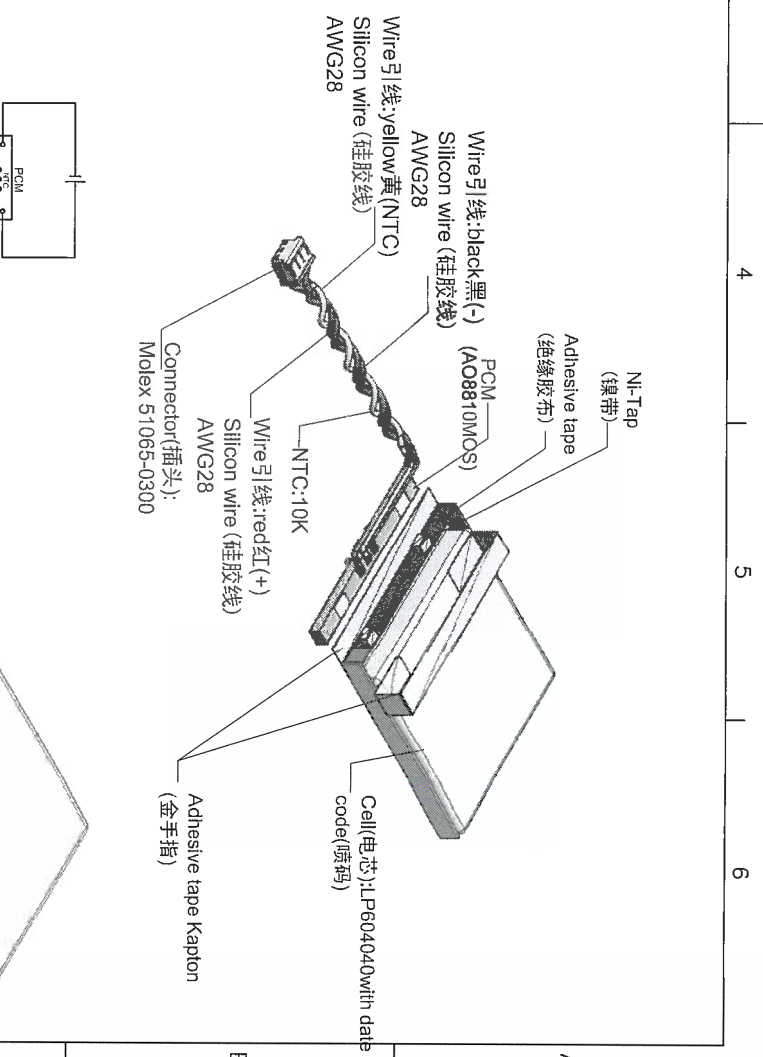


APPROVED

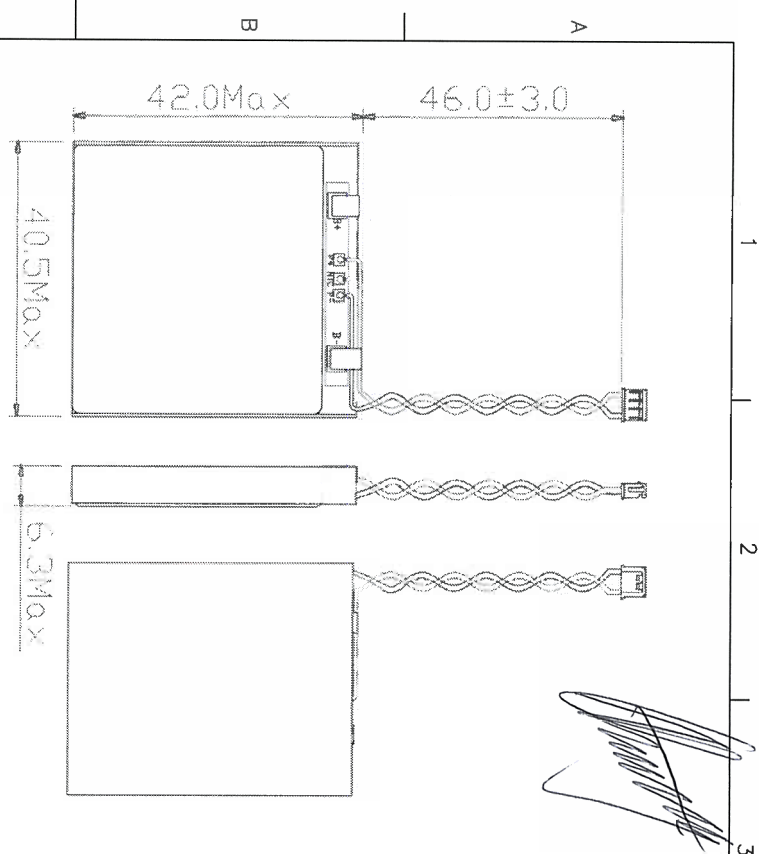

Model: LP604040		Overcharge Detection Voltage(V)	4.28±0.05
Min.Capacity 最低容量(mAh) (0.2C,25±3°C)		Overdischarge Detection Voltage(V)	3.0±0.1
*Single cell capacity (单体电芯容量)		过放保护电压(V)	
Typical Capacity 典型容量(mAh) (0.2C,25±3°C)		Limited to Max loading current 仅用于最大的负载电流 peak value (A)	constant (A)
*Single cell capacity (单体电芯容量)		峰值 2.0 (A)	持续 1.0 (A)
Nominal Voltage 标称电压(V)		Customer required Max loading current 客户要求最大的负载电流 peak value (A)	constant (A)
Internal Impedance 内阻(≤) (mΩ AC 1KHZ)		峰值 (A)	持续 (A)
Charge Temp. 充电温度(°C)		If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)	
Discharge Temp. 放电温度(°C)		Battery protection 相关的电池保护值	
Humidity(湿度)		Related Value: 峰值 (A)	
Ambient Conditions (环境温度)		持续 (A)	

Title		LP604040-PCM-NTC-L/D/	
File NO.		A11155	
Drawn:		leiyuanchang	
Checked 1:		Lily	
Checked 2:			
Approved:			
Draw Date:		2015/04/22	
Revision No.:		E4-2009	
Projection:			
Page:		1/1	
Scale:		1 : 1	
Unit:		mm	

Remark(备注):
 1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
 2. Rohs compliant(严格按照ROHS要求生产).