





MECER

Portable solar system


1000W

Product Features

- Excellent performance because of double CPU intelligent control technology;
- A wide range of applicable loads because of pure sine wave AC output
- The mains supply mode/energy-saving mode/battery mode can be set for flexible
- Convenient and practical 5VDC-USB output port and 12VDC output port;
- Digital LCD and LEDs for visualization of operation status of the equipment
- Overcharge protection and over discharge protection for a longer battery life; ;
- Safe and reliable with intelligent exhaust fan control
- Overall automatic protection and alarms including AC output overload protection. short circuit protection. etc.

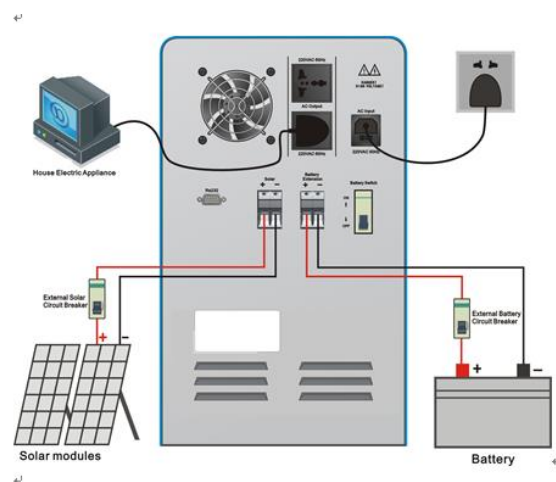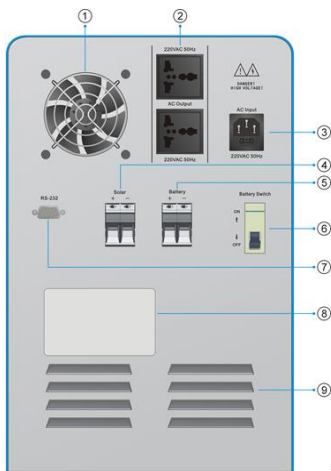

- 1--Fan:
- 2--AC Output (Max. 10A)
- 3--AC Input:
- 4--Solar:Solar module input terminals
- 5--Battery:External battery input terminals(selectable)
- 6--Battery Switch:built-in battery switch
- 7--RS232communication port
- 8--Model stickers
- 9--Heat dissipation window

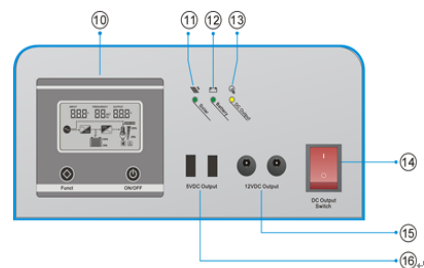

- Instructions:⌄
- ⑩-- Inverter LCD display / operation interface⌄
 - ⑪--Solar: Solar input state indicator⌄
 - ⑫--Battery: Battery mode indicator ⌄
 - ⑬--DC Output: :5VDC-USB、12VDC output indicator⌄
 - ⑭--5VDC-USB、12VDCOutput ON/OFF switch⌄
 - ⑮--12VDC Output: 12VDCOutput terminal⌄
 - ⑯--5VDC Output: 5VDC-USB output terminal⌄

TECHNICAL DATA

Model		SOL-I-CN-1		SOL-I-CN15	
Battery rated voltage (VDC)		12	24	24	
Inverter	Rated power (W)	1000W		1000W	
	Input voltage range (VAC)	160-275VAC			
	Input frequency (Hz)	45Hz-65Hz			
	Output voltage (VAC)	110VAC/220VAC			
	Output frequency (Hz)	50Hz/60Hz			
	Output wave	Pure Sine Wave			
	Specification of built-in battery	1*100AH/12V	2*55AH/12V	2*100AH/12V	
	Communication	RS232			
Solar input	Max. PV voltage (VDC)	≤25	≤50		
	Range of charging voltage (VDC)	10-25	20-50		
	Controller rated charge current (A)	PWM 30A			
	Voltage for overcharge protection (VDC)	14.2	14.2		
	Voltage for overcharge recovery (VDC)	14.0	14.0		
	Solar input power range	150W/180W two pcs in parallel	270W/300W two pcs in parallel		
DC output	Voltage for high voltage protection (VDC)	16V	32V		
	High voltage recovery voltage (VDC)	15.2V	30.4		
	Low voltage recovery voltage (VDC)	12.6V	25.2		
	Low voltage protection voltage (VDC)	11	22		
	5VDC USB output	2units /MAX 2A			
	12VDC output ports	2units/MAX 2A			
Heat dissipation/Cooling		Temperature control by intelligent exhaust fan			
Operating ambient temperature		-20 - +50℃			
Storage ambient temperature		-25 - +55℃			
Operating/Storage ambient		0-90% No condensation			
External size: W*D*H (mm)		423×260×453		513×310×493	
Package size: W*D*H (mm)		520×370×520		610×420×550	

