


SCHEMATIC	
MODEL NO	C

NO.	Description	Material	Q'TY	Finish
6.	Cover	PBT+30% Fibre Glass	1	Black Color
5.	Housing	PBT+30% Fibre Glass	1	Black Color
4.	Pin(2.0φ)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated

<b>S.C. PRECISION INDUSTRIAL CO., LTD.</b>		DATE	DWN	CHKD	APVD	MANAGER
PART NAME : DC POWER JACK   PART NUMBER: SCD438CCS011B00G		10.30.2012	陳麗敏			
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		SCALE:1/1	VERSION:8.0	

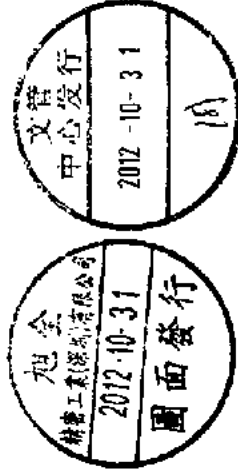

RoHS Compliant

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Current Rating : Max 5.0A , 24V DC  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲ : The Most Important Dimension

1 2 3 4 5 6 7

A B C D E