


Carbon Monoxide Meter



Technical Data

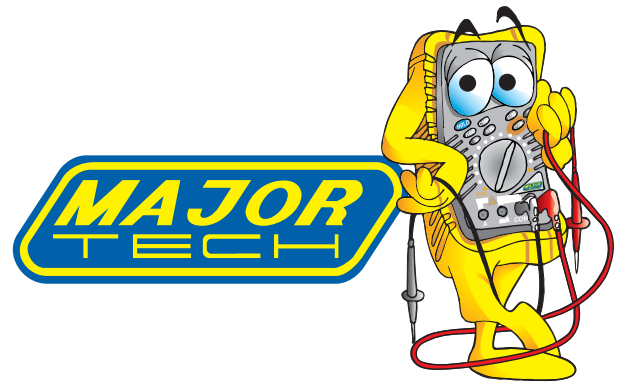

MT180

The MT180 Carbon Monoxide meter makes it easy to take quick and accurate measurements of CO levels. A loud buzzer sounds when the level increases above 200 PPM. The Max hold function displays the maximum CO level.

Features Include:

- Carbon monoxide meter
- From 35 PPM to 200 PPM, the buzzer sounds intermittently with the concentration of CO
- Common sources of potentially dangerous levels of CO are - Poorly maintained furnaces, Fire Places, Gas Heaters , Flue Exhausts, and Coal Mining Environments
- Fast sample time
- Max Hold function
- Large LCD dual display with function indication and backlight
- Backlight LCD for dimly lit areas
- Handy pocket size

General Specifications

Operating Temperature	: 0°C to +50°C
Storage Temperature	: -30°C to +60°C
Operating Humidity	: 0 - 99% Relative humidity (non-condensing)
Measurement Range	: 0 - 1000PPM
Measurement Resolution	: 1PPM
Accuracy	: ± 5% or ± 10PPM
Warm up Period	: < 2 seconds
Battery	: 9V, NEDA, 1604A or IEC 6LR61, or equivalent
Auto Power Off	: Meter automatically shuts down after 15 minutes of inactivity
Sensor Type	: Stabilized electrochemical gas-specific (CO)
Typical Sensor Life	: 3 years
CO Range	: 1PPM ~ 1000PPM
Sensor Type	: Stabilized electromechanical gas - specific (CO)
Battery Life	: 137 Hours
Size	: 160 X 56 X 40mm
Weight	: 180g

