



# FKC08 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE  
UP TO 8 Watts



## FEATURES

- NO MINIMUM LOAD REQUIRED
- 1600VDC INPUT TO OUTPUT ISOLATION
- STANDARD 1.25 X 0.80 X 0.40 INCH 24 PIN DIP AND SMD PACKAGE
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

## APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	OCP	SCP
-------------------	----------------	-----	-----

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @ Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load µF
FKC08-12S33	9 ~ 18	3.3	2000	10	80	3300
FKC08-12S05	9 ~ 18	5	1500	15	83	1600
FKC08-12S12	9 ~ 18	12	666	13	88	350
FKC08-12S15	9 ~ 18	15	533	20	87	240
FKC08-12D05	9 ~ 18	±5	±800	15	83	±1000
FKC08-12D12	9 ~ 18	±12	±333	20	87	±160
FKC08-12D15	9 ~ 18	±15	±267	20	85	±100
FKC08-24S33	18 ~ 36	3.3	2000	10	80	3300
FKC08-24S05	18 ~ 36	5	1500	30	83	1600
FKC08-24S12	18 ~ 36	12	666	13	86	350
FKC08-24S15	18 ~ 36	15	533	15	85	240
FKC08-24D05	18 ~ 36	±5	±800	15	82	±1000
FKC08-24D12	18 ~ 36	±12	±333	15	86	±160
FKC08-24D15	18 ~ 36	±15	±267	13	85	±100
FKC08-48S33	36 ~ 75	3.3	2000	7	80	3300
FKC08-48S05	36 ~ 75	5	1500	8	83	1600
FKC08-48S12	36 ~ 75	12	666	10	86	350
FKC08-48S15	36 ~ 75	15	533	10	86	240
FKC08-48D05	36 ~ 75	±5	±800	8	85	±1000
FKC08-48D12	36 ~ 75	±12	±333	8	87	±160
FKC08-48D15	36 ~ 75	±15	±267	7	87	±100

## PART NUMBER STRUCTURE

<b>FKC08</b> -	<b>48</b>	<b>S</b>	<b>05</b>	-	<b>SMD</b>
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Mounting Type Option
	12: 9~18 24: 18~36 48: 36~75	S: Single	33: 3.3 05: 5 12: 12 15: 15		□: DIP type SMD: SMD type
		D: Dual	05: ±5 12: ±12 15: ±15		

## INPUT SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom)			9	12	18	VDC
	24Vin(nom)			18	24	36	
	48Vin(nom)			36	48	75	
Start up time	Constant resistive load	Power up		700			ms
		Remote ON/OFF		5			
Input surge voltage	100 ms, max.	12Vin(nom)					36
		24Vin(nom)					
		48Vin(nom)					
Input reflected ripple current				20			mAp-p
Input filter							Pi type
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON	Open or 3.5 ~ 12VDC			mA
			DC-DC OFF	Short or 0 ~ 1.2VDC			
			Input current of Ctrl pin	-0.5	+0.5		
			Remote off input current	2.5			mA

## OUTPUT SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Voltage accuracy				-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load			-0.2		+0.2	%
Load regulation	No Load to Full Load	DIP type	Single	-0.5		+0.5	%
			Dual	-1.0		+1.0	
		SMD type	Single	-1.0		+1.0	
			Dual	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL		Dual	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth			50			mVp-p
Temperature coefficient				-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			200			µs
Over load protection	% of Iout rated			150			%
Short circuit protection							Continuous, automatic recovery

## GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	DIP type	Input to Output	1600			VDC
			Input (Output) to Case	1600			
		SMD type	Input to Output	1600			
			Input (Output) to Case	1000			
Isolation resistance	500VDC			1			GΩ
Isolation capacitance				300			pF
Switching frequency				270	300	330	kHz
Safety approvals							UL60950-1 EN60950-1 IEC60950-1
Case material							Nickel-coated copper
Base material							Non-conductive black plastic
Potting material							Epoxy (UL94 V-0)
Weight							18g (0.62oz)
MTBF	MIL-HDBK-217F						3.543 x 10 <sup>6</sup> hrs

## ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating			-40			+70 °C
	With derating			+70			+100 °C
Maximum case temperature							100 °C
Storage temperature range				-55			+125 °C
Thermal impedance	Natural convection			20			°C/W
Thermal shock							MIL-STD-810F
Vibration							MIL-STD-810F
Relative humidity							5% to 95% RH

## EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI <sup>(1)</sup>	EN55022	Class A · Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient <sup>(2)</sup>	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge <sup>(2)</sup>	EN61000-4-5 ± 1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

### Note:


- The standard modules meet EMI Class A or Class B with external components. For further information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter Power Mate suggests: Nippon chemi-con KY series, 220μF/100V.

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


## CHARACTERISTIC CURVE

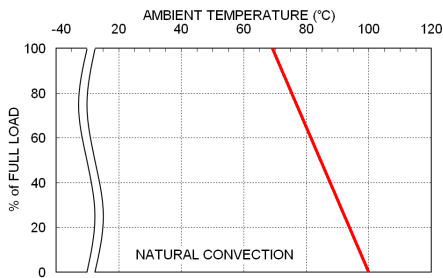

FKC08-48S05 Derating Curve

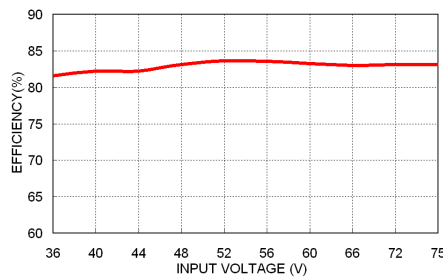


FKC08-48S05 Efficiency vs. Input Voltage

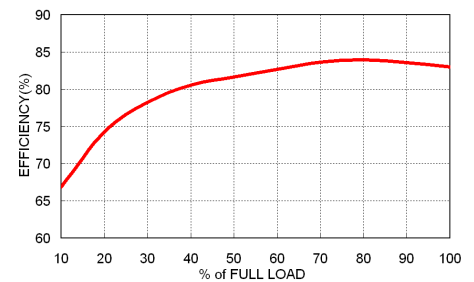

FKC08-48S05 Efficiency vs. Output Load

## MECHANICAL DRAWING

### DIP type

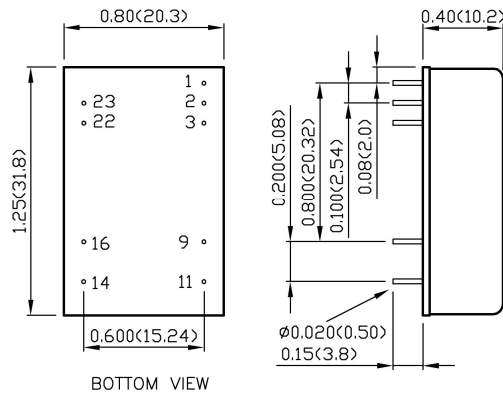


BOTTOM VIEW

### PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl			
2	-Vin	-Vin	23	+Vin	+Vin
3	-Vin	-Vin	22	+Vin	+Vin
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout

### SMD type

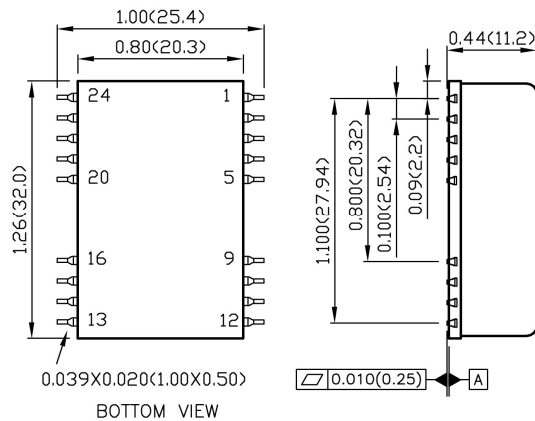

BOTTOM VIEW

### PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl			
2	-Vin	-Vin	23	+Vin	+Vin
3	-Vin	-Vin	22	+Vin	+Vin
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout
Others	NC	NC			

- All dimensions in inch (mm)
- Tolerance : x.xx±0.02 (x.xx±0.5)  
x.xxx±0.01 (x.xx±0.25)
- Pin pitch tolerance ±0.01 (0.25)
- Pin dimension tolerance ±0.004(0.1)