

ROC SERIES

Edition 1: 05/07/2016

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 - POLYESTER BOX WITH POLYCARBONATE OPAQUE LID - MOD.: 3x4 Reference: ROC34PO

Characteristics:

Product type:	Polyester double insulation box with opaque cover
Dimensions cabinet:	(AxBxC) 270x360x171 mm
Installation:	Surface
Type of door:	Opaque polycarbonate lid
Locking:	Sealable screws for use with a screwdriver
Finish:	Fibreglass-reinforced hot-pressed polyester
Colour:	RAL 7035 grey
Mounting plate:	Without mounting plate
Weight (Kg):	1,05
Materials:	Base in polyester - Transparent lids made of polycarbonate UV.

Technical data:

Degree of protection:	IP66
Resistance to impact:	IK09
Ambient temperature range:	-40°C / +100°C
Maximum operating voltage:	-

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208 / UNE-EN 61439-1 (as applicable)
Certificates:	




ROC SERIES

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 - POLYESTER BOX WITH POLYCARBONATE OPAQUE LID - MOD.: 3X4

Reference: ROC34PO

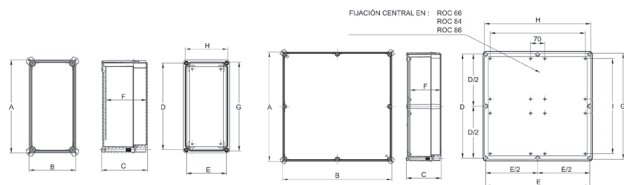

Pictures and drawings are standards. To get more details please surf www.ide.es to download those files (pdf, dxf, igs).

Dimensions cabinet: (AxBxC) 270x360x171 mm

Cable entry: -

Body to be flush-fitted: -

Wall fixing: (GxH) 245x335 mm

Inside usable space: (DxExF) 250x340x154 mm

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in a single box per packaging multiples. Each reference includes a bag with four standard manual closing screws and four screws for fixing to the base plate.