

TVT

Secure The World With You

www.tvt.net.cn



TD-7421AS

2 MP AHD IR Water-proof Bullet Camera

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057

Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn

2 MP AHD IR Water-proof Bullet Camera


Specifications



Features

- 1080P real time image, high resolution, true color
- AHD lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 10 ~ 20m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

Dimensions

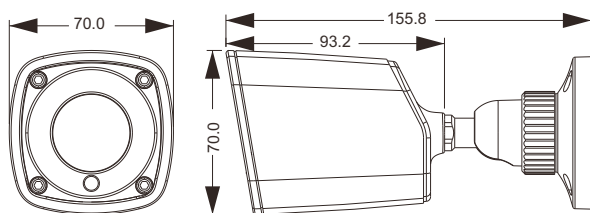

Available Accessories



TD-YXH0201

| Model | TD-7421AS |
|--------------------------|--|
| Specifications | |
| Camera | |
| Image Sensor | 1 / 3.6 "CMOS |
| Resolution | 2MP |
| Image Size | 1920 x 1080 |
| Video Output | AHD / TVI / CVI / CVBS |
| Image System | PAL / NTSC |
| Electronic Shutter | Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC) |
| IR Distance | 10 ~ 20 m |
| Frame Rate | 30fps (60Hz), 25fps (50Hz) |
| Min. Illumination | 0 Lux (IR ON) |
| Lens | 3.6 mm (2.8 mm optional) |
| Lens Mount | M12 |
| S / N Ratio | ≥52dB (AGC OFF) |
| Ingress Protection | IP66 |
| Functions | |
| Function Control | OSD (COC Control) |
| Day & Night | ICR |
| Digital WDR | Yes |
| Digital NR | Yes |
| Global Exposure | Yes |
| Central Exposure | Yes |
| AGC | Yes |
| Auto White Balance | Yes |
| BLC | Yes |
| Front Light Compensation | Yes |
| Sharpness | Yes |
| Smart IR | Yes |
| Image Setting | Yes |
| Defect Correction | Auto |
| Language | Chinese / English |
| Angle Adjustment | Any angle |
| Others | |
| Power Supply | DC12V (± 10%) |
| Power Consumption | Day : < 1W; Night : < 3W |
| Working Environment | - 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity) |
| Dimensions (mm) | Φ 70 x 156 |

Available Model

| | |
|-----------------|-------------------------|
| Available Model | TD-7421AS (P-D / IR1) |
| | TD-7421AS (N-D / IR1) |