

TVT

Secure The World With You

www.tvt.net.cn



TD-9534S1

**3 MP Network IR Water-proof
Dome Camera**

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn


3 MP Network IR Water-proof Dome Camera

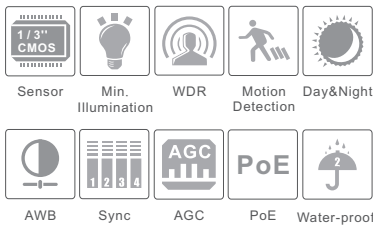

Features

- 3MP (2048 x 1536) coding
- Max resolution: 2048 x 1536
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply optional
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

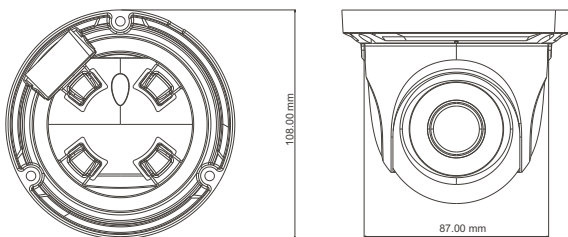

Available Accessories



TD-YXH0201 TD-YZJ0802 TD-YZJ0402

Specifications

Model	TD-9534S1
Specifications	
Camera	
Image Sensor	1 / 3 "CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Auto Iris	Fixed Iris
Min. Illumination	0.07 lux @F1.2,AGC ON; 0 lux with IR
Lens	3.6 mm @ F2.0, angle of view: 70° (2.8 mm optional)
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any angle
Image	
Video Compression	H.264 / MJPEG
H.264 Compression Standard	Baseline Profile / Main Profile / High Profile
Resolution	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream	60Hz : 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	3 ROI
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion alarm
PoE	Optional
IR Distance	10 ~ 20 m
Water-proof	IP66
Others	
Power Supply	DC12V (PoE power supply optional)
Power Consumption	< 2W
IR Consumption ON	< 4.5W
Operating Environment	- 20°C ~ 50°C, 10% ~ 90% humidity
Dimensions (mm)	Φ87 × 108
Weight (net)	400g
Installation	Pendent mounting (Wall mounting available with the junction box and bracket)

Available Model

Available Model	TD-9534S1 (D / PE / AR1)
	TD-9534S1 (D / AR1)