

DC/DC Converter

URA(B)_LD-15WR2 & URA(B)_LD-20WR2 Series

MORNSUN®

15W&20W,Ultra wide input isolated & regulated dual / single output DC/DC converter



FEATURES

- Wide range of input voltage (4:1)
- Efficiency up to 90%
- Isolation voltage :1.5K VDC
- Output over-voltage, over-current, Short circuit protection
- Operating temperature range: -40°C to +85°C
- Six-sided metal shielding package
- Meet CISPR22/EN55022 CLASS A
- A2S (wiring mounting) and A4S (35mm rail mounting) products featuring anti-reverse connection for input
- Meet UL60950 and EN60950
- International standard pin-out

Patent Protection RoHS c us CB CE



URA(B)_LD-15WR2 & URA(B)_LD-20WR2 series are applied to wide voltage range input situation such as data transmission device, battery power supply device, telecommunication device ,distributed power supply system, remote control system, industrial robot system etc.

Selection Guide

Certification	Part No. ①	Input Voltage (VDC)		Output		Efficiency ③ (%,Min./Typ.) @ Full Load	Max. Capacitive Load ④ (μF)		
		Nominal (Range)	Max. ②	Output Voltage (VDC)	Output Current (mA)(Max./Min.)				
CE	URA2405LD-15WR2	24 (9-36)	40	±5	±1500/±75	84/86	4800		
	URA2412LD-15WR2			±12	±625/±32	86/88	800		
	URA2415LD-15WR2			±15	±500/±25	86/88	500		
	URB2403LD-15WR2			3.3	4000/200	85/87	10200		
	URB2405LD-15WR2			5	3000/150	88/90	4020		
	URB2412LD-15WR2			12	1250/63	87/89	1035		
	URB2415LD-15WR2			15	1000/50	87/89	705		
	URB2424LD-15WR2			24	625/31	88/90	470		
	URA4805LD-15WR2			48 (18-75)	80	±5	±1500/±75	84/86	4800
URA4812LD-15WR2	±12	±625/±32	86/88			800			
URA4815LD-15WR2	±15	±500/±25	87/89			500			
URB4803LD-15WR2	3.3	4000/200	83/85			10200			
URB4805LD-15WR2	5	3000/150	85/87			4020			
UL/CB/CE	URB4812LD-15WR2	48 (18-75)	80	12	1250/63	86/88	1035		
	URB4815LD-15WR2			15	1000/50	88/90	705		
	URA2405LD-20WR2			24 (9-36)	40	±5	±2000/±100	84/86	4800
	URA2412LD-20WR2					±12	±834/±42	86/88	800
	URA2415LD-20WR2					±15	±667/±33	86/88	625
URB2403LD-20WR2	3.3	5000/250	84/86			18700			
URB2405LD-20WR2	5	4000/200	88/90			9600			
CE	URB2409LD-20WR2	24 (9-36)	40	9	2222/111	86/88	4700		
	URB2412LD-20WR2			12	1667/84	87/89	1600		
	URB2415LD-20WR2			15	1333/67	88/90	1000		
	URB2424LD-20WR2			24	834/42	88/90	500		
	URA4805LD-20WR2	48 (18-75)	80	±5	±2000/±100	84/86	4800		
	URA4812LD-20WR2			±12	±834/±42	86/88	800		
	URA4815LD-20WR2			±15	±667/±33	87/89	625		

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2015.08.11-B/0

Page 1 of 9

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

UL/CE	URB4803LD-20WR2			3.3	5000/250	84/86	18700
	URB4805LD-20WR2			5	4000/200	86/88	9600
	URB4812LD-20WR2			12	1667/84	87/89	1600
	URB4815LD-20WR2			15	1333/67	88/90	1000
	URB4824LD-20WR2			24	834/42	88/90	500

Note:

① Series with suffix "H" are heat sink mounting; series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting, for example URB2405LD-15WHR2A2S is chassis mounting of with heat sink, URB2405LD-15WR2A4S is DIN-Rail mounting of without heat sink; If the application has a higher requirement for heat dissipation, you can choose modules with heat sink;

② Absolute maximum rating without damage on the converter, but it isn't recommended;

③ The efficiency of A2S (wiring type) and A4S (rail type) products is 2% lower than the above-mentioned value due to the reverse connection protection for input;

④ The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	15W	24VDC input	3.3/5 VDC output	--	726/45	745/60	mA
			Others output	--	711/15	727/25	
		48VDC input	3.3/5 VDC output	--	363/35	372/50	
			Others output	--	355/10	363/20	
	20W	24VDC input	3.3/5 VDC output	--	969/60	992/75	
			Others output	--	947/15	970/25	
		48VDC input	3.3/5 VDC output	--	485/35	496/50	
			Others output	--	473/10	485/20	
Reflected Ripple Current	24VDC/48VDC input		--	30	--		
Input impulse Voltage (1sec. max.)	24VDC input		-0.7	--	50	VDC	
	48VDC input		-0.7	--	100		
Input Filter	Pi filter						
Starting Time	Nominal input & constant resistance load		--	10	--	ms	
Ctrl*	Module switch on		Ctrl suspended or connected to TTL high level (2.5-12VDC)				
	Module switch off		Ctrl pin connected to GND or low level (0-1.2VDC)				
	Input current when switched off		--	1	--	mA	
Hot Plug	Unavailable						

Note: * the voltage of Ctrl pin is relative to input pin GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Positive output	--	±1	±3	%
	Negative output				
Balance of Output Voltage	Dual output, balanced load	--	±0.5	±1	
Line Regulation	Full load, the input voltage is from low voltage to high voltage	--	±0.2	±0.5	
Load Regulation	5%-100% load	--	±0.5	±1	%
Cross Regulation	Dual output, main circuit with 50% load, auxiliary circuit with 10%-100% load	--	--	±5	
Transient Recovery Time	25% load step change	--	300	500	μs
Transient Response Deviation		--	±3	±5	%
Temperature Drift Coefficient	Full load	--	±0.02	--	%/°C
Ripple & Noise *	20MHz bandwidth	--	70	100	mV p-p
Trim		--	±10%Vo	--	VDC
Over-voltage Protection	3.3VDC output	--	3.9	--	
	5VDC output	--	6.2	--	
	9VDC output	--	10.8	--	

	12VDC output	--	15	--	
	15VDC output	--	18	--	
	24VDC output	--	30	--	
Over-current Protection	Input voltage range	--	160	--	%
Short circuit Protection		Hiccup, Continuous, self-recovery			

Note: *Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	1500	--	--	VDC	
Isolation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	MΩ	
Isolation Capacitance	Input-output, 100KHz/0.1V	24VDC output	--	2000	--	pF
		Others	--	1000	--	
Operating Temperature	Derating if the temperature is $\geq 71^{\circ}\text{C}$ (see Fig. 1)	-40	--	+85	$^{\circ}\text{C}$	
Storage Temperature		-55	--	+125		
Storage Humidity	Non-condensing	5	--	95	%RH	
Max. Casing Temperature	Within the operating temperature curve	--	--	+105	$^{\circ}\text{C}$	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	+300		
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z				
Switching Frequency	PWM mode	--	300	--	KHz	
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	1000	--	--	K hours	

Physical Specifications

Casing Material		Aluminum alloy		
Dimension	Without heat sink	Horizontal package	50.80*25.40*11.80mm	
		A2S wiring package	76.00*31.50*21.20 mm	
		A4S rail package	76.00*31.50*25.80 mm	
	With heat sink	Horizontal package	50.80*25.40*16.30mm	
		A2S wiring package	76.00*31.50*25.10 mm	
		A4S rail package	76.00*31.50*29.70 mm	
Weight	Without heat sink	Horizontal package/A2S wiring package/A4S rail package		28.00g/50.00g/70.00g(Typ.)
	With heat sink	Horizontal package/A2S wiring package/A4S rail package		36.00g/58.00g/78.00g(Typ.)
Cooling Method		Free convection		

EMC Specifications

EMI	CE	CISPR22/EN55022 CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)		
	RE	CISPR22/EN55022 CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)		
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 4\text{KV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity		IEC/EN61000-4-29	0-70%

Product Characteristic Curve






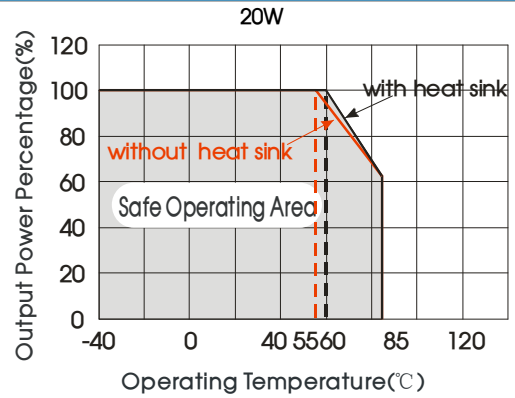


Fig. 1

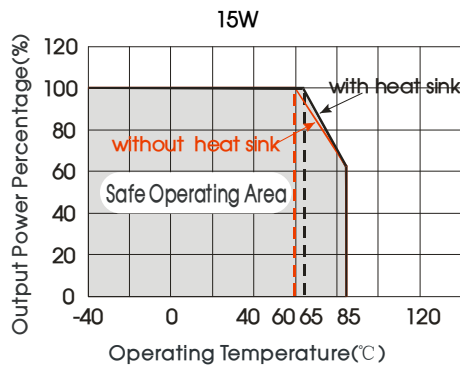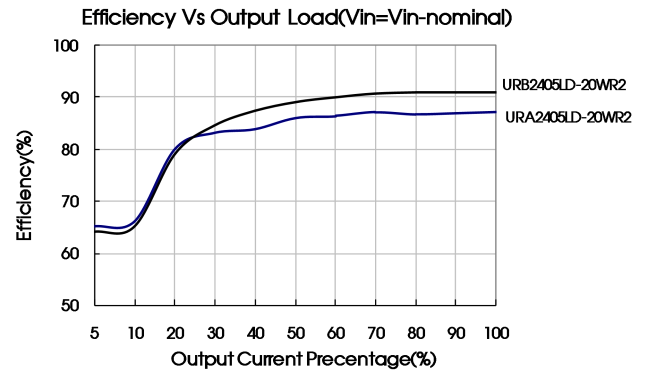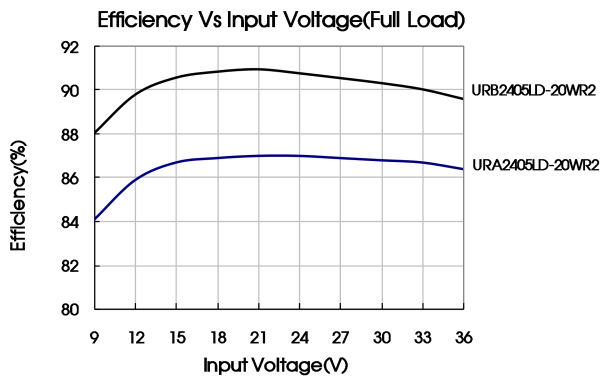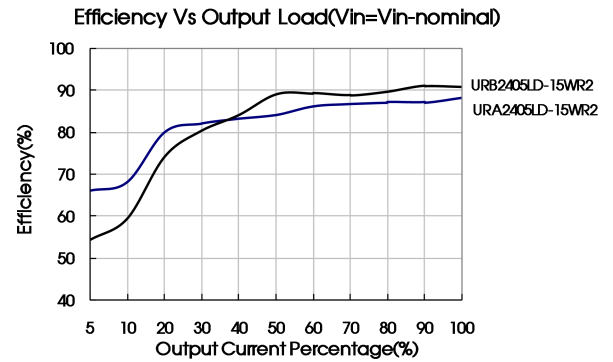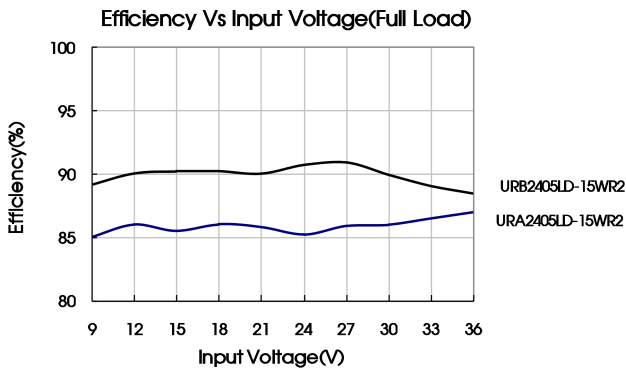

Design Reference

1. Typical application

All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery.

If a further decrease of the input and output ripple is required, properly increase the input & output of additional capacitors C_{in} and C_{out} or select capacitors of low equivalent impedance, and ensure the capacitance should be lower than the max. capacitive load of the product.

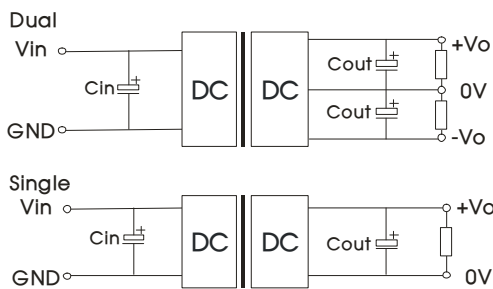


Fig. 2

Vout(VDC)		Cin(μF)	Cout(μF)
Dual	±5	100	220
	±12/±15		100
Single	3.3/5	100	470
	9/12/15		220
	24		100

2. EMC solution-recommended circuit

Parameter description

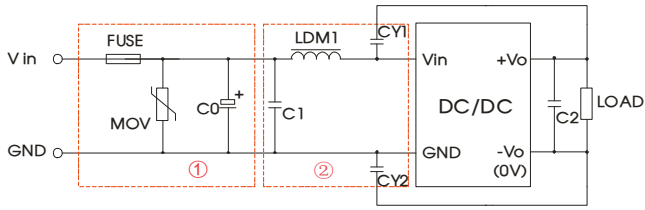


Fig. 3

Notes: Part ① in the Fig. 3 is used for EMS test and part ② for EMI filtering; selected based on needs.

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
MOV	S14K35	S14K60
C0	330μF/50V	330μF/100V
C1	1μF/50V	1μF/100V
C2	Refer to the Cout in Fig.2	
LDM1	4.7μH	
CY1, CY2	1nF/2KV	

EMC solution-recommended circuit PCB layout


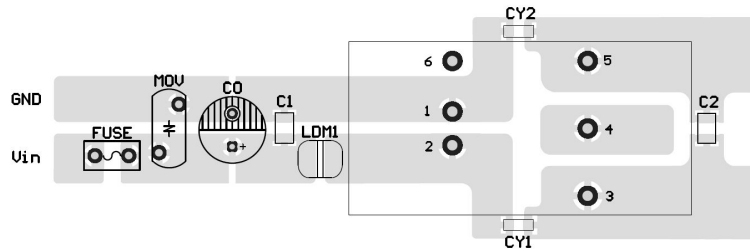


Fig. 4

Note: the min. distance of the bonding pads between input & output isolation capacitors (CY1/CY2) shall be ≥ 2mm.

1. Application of Trim and calculation of Trim resistance

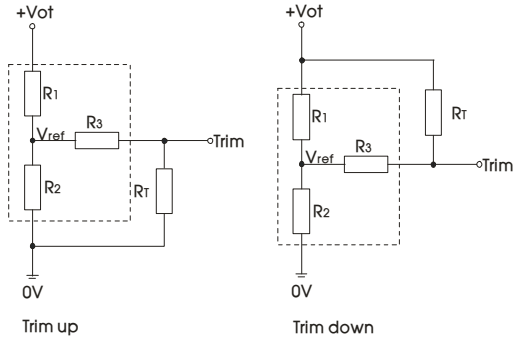

Calculation formula of Trim resistance:

$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

Applied circuits of Trim (Part in broken line is the interior of models)



Note: Leave open if not used. R_T: Resistance of Trim. a: User-defined parameter, no actual meanings.

Vout(V)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
3.3	4.801	2.863	15	1.24
5	2.883	2.864	10	2.5
9	7.500	2.864	15	2.5
12	10.971	2.864	17.8	2.5
15	14.497	2.864	17.8	2.5
24	24.872	2.863	20	2.5

3. It is not allowed to connect modules output in parallel to enlarge the power


4. For more information about Mornsun EMC Filter products, please visit www.mornsun-power.com to download the Selection Guide of EMC Filter

Dimensions and Recommended Layout(Without heatsink)

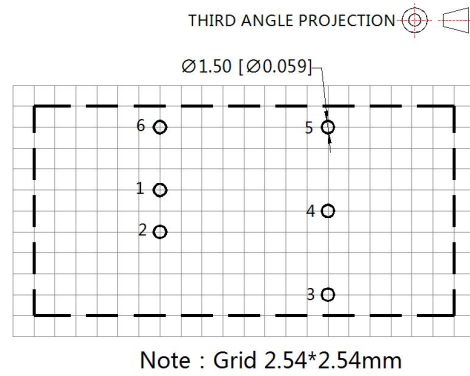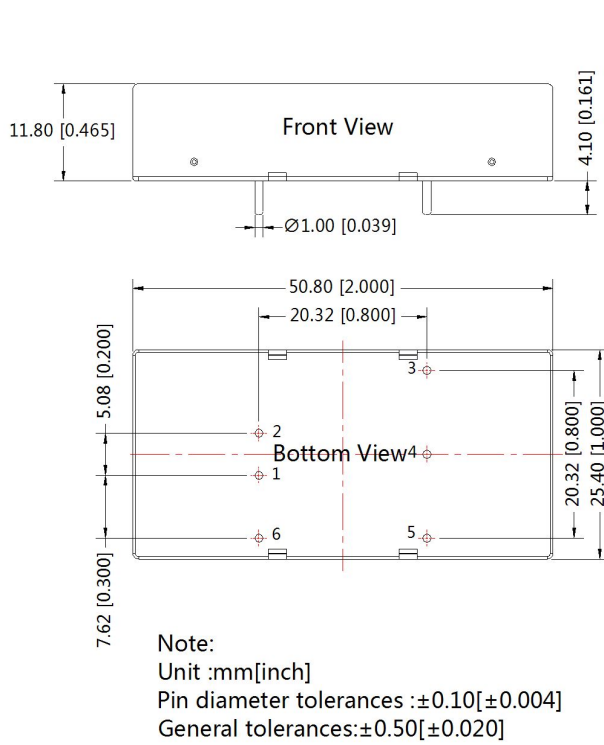

Pin-Out		
Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	Trim	0V
5	0V	-Vo
6	Ctrl	Ctrl

Dimensions (With heatsink)

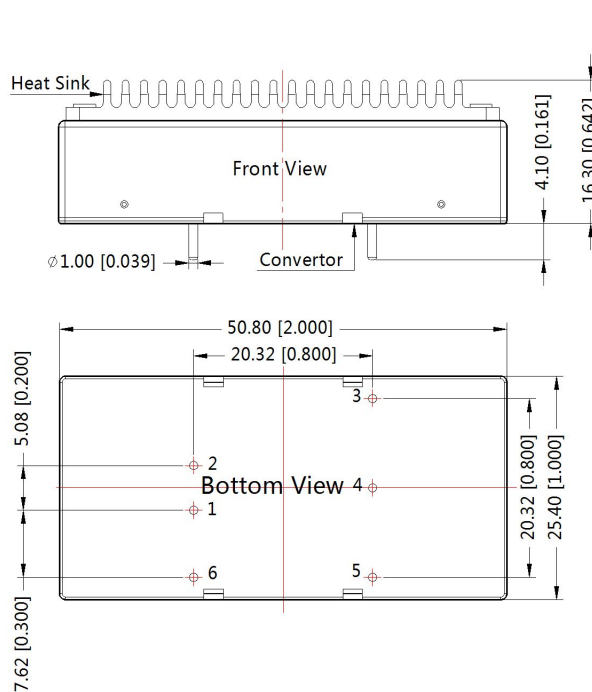


THIRD ANGLE PROJECTION

Pin-Out		
Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	Trim	0V
5	0V	-Vo
6	Ctrl	Ctrl

A2S Wiring Package Dimensions(Without heatsink)

THIRD ANGLE PROJECTION

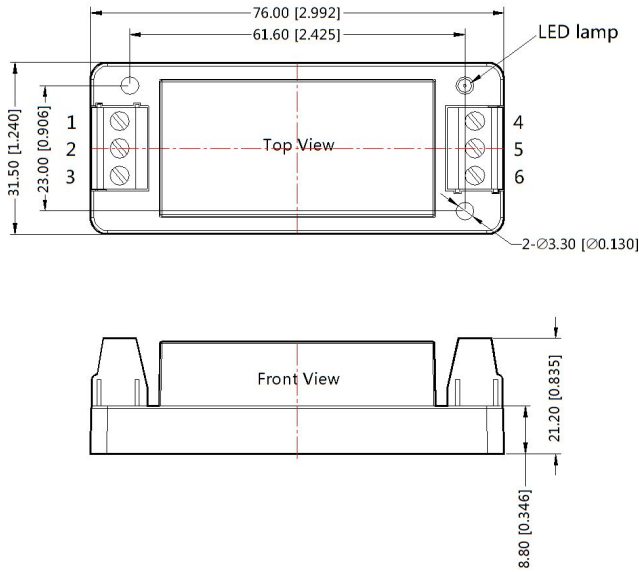


Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo
Single	Ctrl	GND	Vin	0V	Trim	+Vo

Note:
 Unit:mm[inch]
 Wire range : 24~12 AWG
 General tolerances:±0.50[±0.020]

A2S Wiring Package Dimensions(With heatsink)

THIRD ANGLE PROJECTION

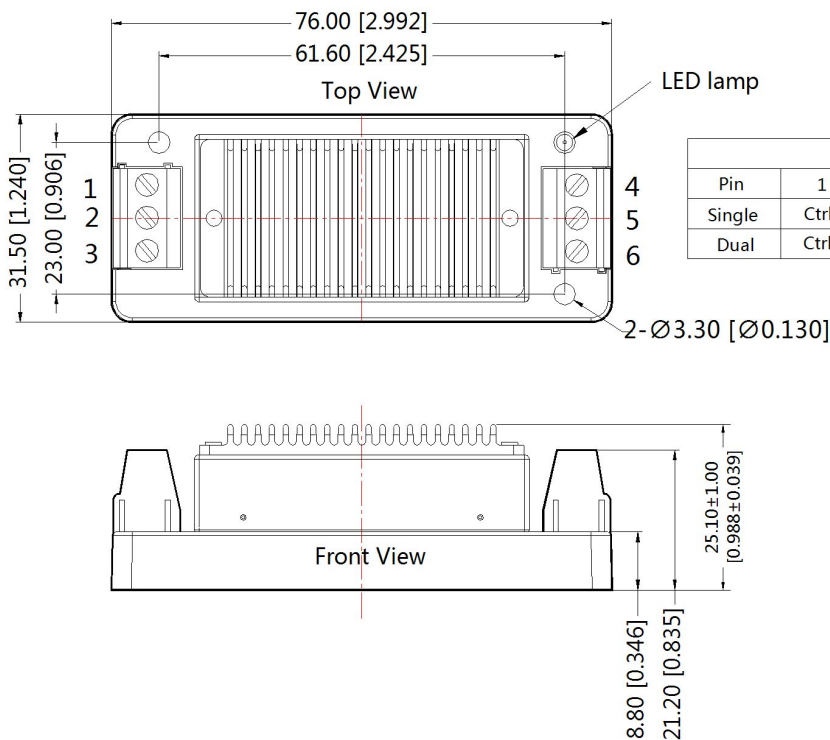


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	0V	Trim	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo


Note:
 Unit:mm[inch]
 Wire range:24~12 AWG
 General tolerances:±0.50[±0.020]

A4S Rail Package Dimensions(Without heatsink)

THIRD ANGLE PROJECTION

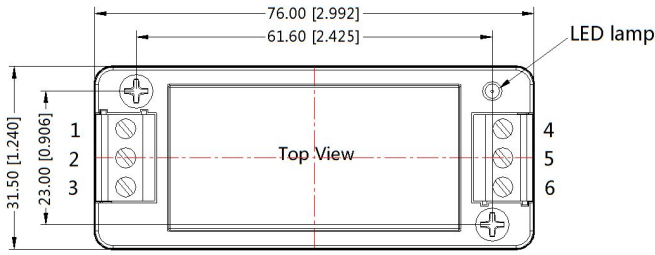


Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo
Single	Ctrl	GND	Vin	0V	Trim	+Vo

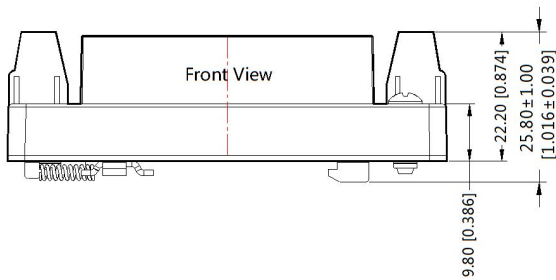


Note:
 Unit:mm[inch]
 Wire range : 24~12 AWG
 General tolerances:±0.50[±0.020]

A4S Rail Package Dimensions(With heatsink)

THIRD ANGLE PROJECTION

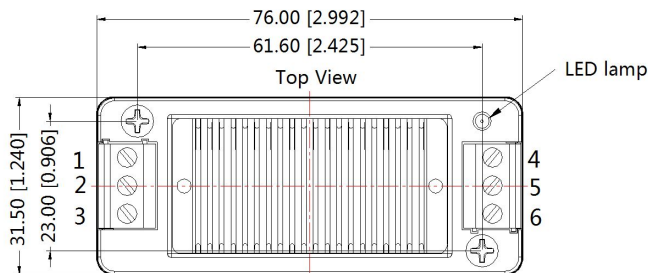

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	0V	Trim	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo

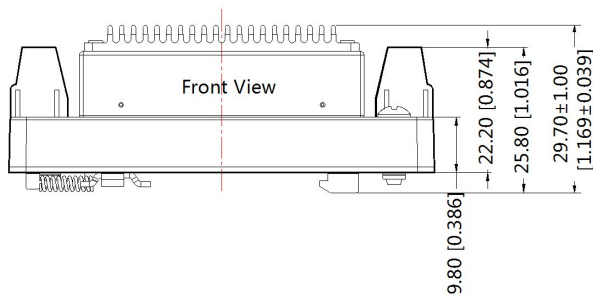

Note:
 Unit:mm[inch]
 Wire range:24~12 AWG
 General tolerances:±0.50[±0.020]

Notes:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Horizontal Packing Bag Number : 58200035(without heatsink),58200051(with heatsink), A2S/A4S Packing Bag Number: 58220022;
2. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
3. The recommended unbalance degree of the dual output module load is $\leq \pm 5\%$; if the degree exceeds $\pm 5\%$, than the product performance cannot be guaranteed to comply with all parameters in the datasheet. Please contact our technicians directly for specific information;
4. The maximum capacitive load offered were tested at nominal input voltage and full load;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
8. We can provide product customization service;
9. Specifications are subject to change without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn