



PHOTOELECTRIC DETECTOR AN900-B50/75/100/150/200/250



3 YEAR WARRANTY


The AN900-B series are triplicate photoelectric detectors designed to provide reliable perimeter security both indoors and outdoors.

It consists of separate transmitters and receivers. The transmitter emits invisible infrared beams with changing frequencies to the receiver. The frequencies change in a certain range to protect beams from disturbance.

The changing frequencies feature can also help cut power consumption to extend the detectors' life span.

Quick alignment system is built-in to speed up accurate and reliable positioning. This detector uses 3 pulsed infrared beams that are designed to activate an alarm only when all 3 beams are simultaneously blocked.

AN900-B50/75/100/150/200/250

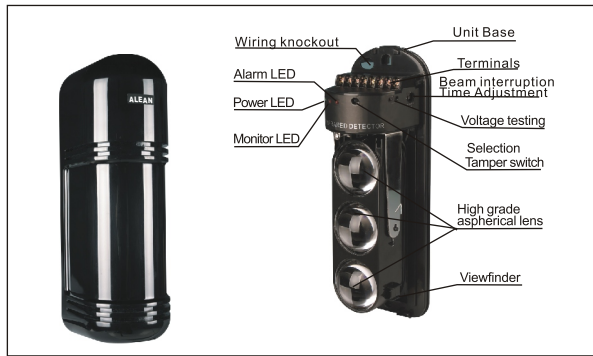

■ Design Durability

Highly Durable and Heat-Resistant Housing Cover and Chassis. The housing cover and chassis provide higher durability against shocks, high temperatures, and many other harsh environmental conditions.

■ Frost and Dew Protection

An anti-frost and convex visor design is incorporated to protect the detector from effect of frost and dew.

■ High Grade Aspherical Lens

The high grade Aspherical lens creates more sharply defined and precise infrared beams compared to ordinary fresnel lenses

■ Triplicate Synchronized Pulsed Beams Designed for Greater Stability


It requires simultaneous interruption of all beams to trigger an activation. No activation is generated when a bird or falling eaves break just one or two beam

■ 99.5% Beam Blocking stability

Stable operation is maintained with as much as 99.5% of the beam's energy blocked by heavy rain, dust storms, snow or fog.

■ Adjustable Beam Interruption Period

The Beam Interruption Time (the amount of time a beam must be broken for an alarm to occur) can be adjusted to fit any application. For example, when protecting a wall or fence, a longer interruption time will catch intruders, but let jumping cats pass through without setting off an Alarm.

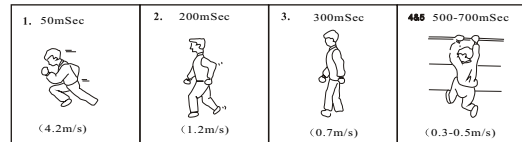


■ Quick optical and voltage alignment with 10 LEDs to speed up positioning

A removable viewfinder allows for easy alignment even in some of the most difficult mounting situations. In the receiver there are 10 LEDs and two jacks for quick and accurate alignment. The rotating dial and voltage measuring allows the installer to finely adjust the beam easily horizontally ($180^\circ \pm 90^\circ$) or vertically ($20^\circ \pm 10^\circ$) until suggested lit LEDs or value are obtained

■ A.G.C. (Automatic Gain Control) Circuit

The A.G.C. Circuit continually monitors for gradual changes in the signal's strength caused by changing weather conditions. It adjusts the sensitivity accordingly to main-tain the proper signal level for the current Environmental conditions.

DIMENSIONS

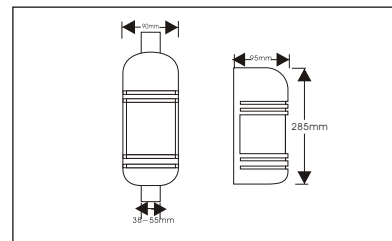

SPECIFICATIONS

MODEL	AN900-B50	AN900-B75	AN900-B100	AN900-B125	AN900-B150	AN900-B180	AN900-B200	AN900-B250	
Detection method	Infrared photoelectric								
Range	Outdoor	50m	75m	100m	125m	150m	180m	200m	250m
	Indoor	150m	225m	300m	375m	450m	540m	600m	750m
Beam characteristics	Pulsed infrared triplicate beams								
Interruption period	50~700msec(selectable)								
Power input	DC12~24V/AC11~18V								
Current consumption	70mA max		80mA max		90mA max		100mA max		
Alarm period	2sec(± 1)nominal								
Alarm output	Form C relay(AC/DC30V 0.5Amax)								
Tamper switch	N.C.Opens when coveris removed (receiveronly)								
Operating temperature	$-25^\circ\text{C}\sim+55^\circ\text{C}$								
Environment humidity	95% max								
Alignment angle	$\pm 10^\circ$ vertical, $\pm 90^\circ$ horizontal								
Mounting	Wall or pole								
Weight	2168g(Both transmitter and receiver)								
Appearance	PC Resin(Black)								

Specifications and design are subject to change without prior notice.

