

THE DUOLINE SERIES

Fax Machine Protector ~ "Faxtector"

12-00169

Features

- Easy installation
- Failsafe protection
- Visual indication
- Slimline, compact
- Lightweight

The Faxtector is a lightweight protection unit designed especially for Fax machines. The unit is compact, and easy to install. The protector offers power and data protection for the connected equipment. The protection unit features a thermal disconnect device along with visual indication, showing the status of the unit. Various power inputs and outputs are available.



Specifications

Power Module


| | |
|-------------------------------|-------------------------|
| Nom. continuous voltage | 230V 50Hz |
| Max. continuous current | 6A |
| Max. discharge current (8/20) | 4kA L-N, L-E, N-E |
| Response Time | <25ns |
| Residual Voltage | Approx. 900V |
| Temperature Range | -20 C +70 C |
| Connector | IEC |
| Standards compliance | IEC 6164-1, ANSIC 62.41 |

Specifications

Data Module

| | |
|---------------------------------------|------------|
| Max. discharge current (8/20) | 10kA |
| Residual voltage (Differential mode) | <100V |
| Residual voltage (Common mode) | <100V |
| Response Time | 10ns |
| Data speed | 128Kbits/s |
| Connector | RJ 11 |
| No. of wires | 2 |

Dimensions

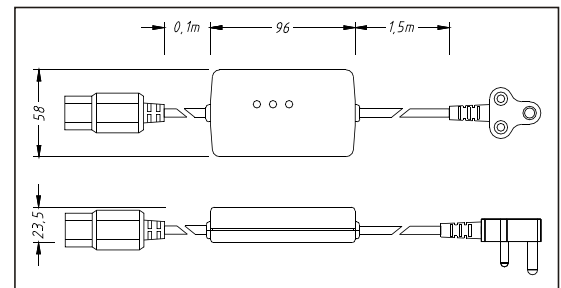

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: sales@clearline.co.za

www.clearline.co.za

