


1/3 inch NTSC/PAL CCD Image Sensor with 720 X 480 Pixel Array

I. Typical Parameters

| | |
|-----------------------|--|
| Total Pixel Array | 762(H) x 504(V) |
| Effective Pixel Array | 728(H) x 488(V) |
| Pixel Size | 6.35 um x 7.4 um |
| Effective Image Area | 4622.8 um x 3611.2 um |
| Optical Formast | 1/3 inch |
| Max. Clock frequency | 54 MHz |
| Max. Frame Rate | - 60fps, 720x480 YC bCr @ 54MHz - 60fps, 720x480 Bayer @ 27MHz - 60field, 720x240(288) YC bCr @ 27MHz - CVBS 30 fps @ 27MHZ |
| Waterproof | Ip67-IP68 |
| Power Supply | Analog : 2.8V, HVDD : 2.8V, CVDD : 2.8V, |
| Operating Temperature | -25°C~75°C(RH95% Max.) |
| Storage Temperature | -30°C~75°C(RH95% Max.) |

II. Installation

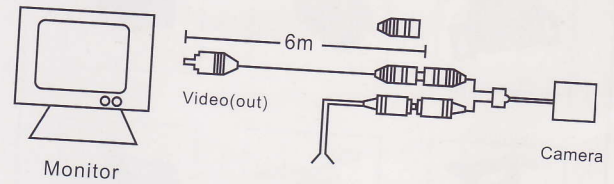

- ⊙ Yellow socket is connected to video
- ⊙ Power socket is connected to DC 12V

Mount the camera inside the keyhole of your vehicle. Adjust the lens of the camera to its best position. Connect Power cord (black) to your vehicle DV 12V Power system. Connect the video output(yellow) of the camera to the display in your vehicle.

III. Features

Uses with this item no more wonder what's going on in the back. Displays a reversed camera image on the monitor to duplicate the normal view seen in the rear view mirror. Perfect solution to get rid of that poor rear view visibility on your car, trailer, truck or any vehicle which has no rear view mirror or poor rear vision.

- ◆ Small compact size
- ◆ Low power consumption
- ◆ Low maintenance
- ◆ Easy and comprehensive installation
- ◆ Waterproof
- ◆ High sensitivity
- ◆ Night Vision Camera

※If there being unmatched with the Instruction Manual, please refer to the actual performance of the camera concerned.

CCD Rear View Camera

PRODUCT MANUAL




1/3 inch NTSC/PAL CCD Image Sensor with 720 X 480 Pixel Array

I. Typical Parameters

| | |
|-----------------------|--|
| Total Pixel Array | 762(H) x 504(V) |
| Effective Pixel Array | 728(H) x 488(V) |
| Pixel Size | 6.35 um x 7.4 um |
| Effective Image Area | 4622.8 um x 3611.2 um |
| Optical Formast | 1/3 inch |
| Max. Clock frequency | 54 MHz |
| Max. Frame Rate | - 60fps, 720x480 YC bCr @ 54MHz - 60fps, 720x480 Bayer @ 27MHz - 60field, 720x240(288) YC bCr @ 27MHz - CVBS 30 fps @ 27MHZ |
| Waterproof | Ip67-IP68 |
| Power Supply | Analog : 2.8V, HVDD : 2.8V, CVDD : 2.8V, |
| Operating Temperature | -25°C~75°C(RH95% Max.) |
| Storage Temperature | -30°C~75°C(RH95% Max.) |

2

II. Installation

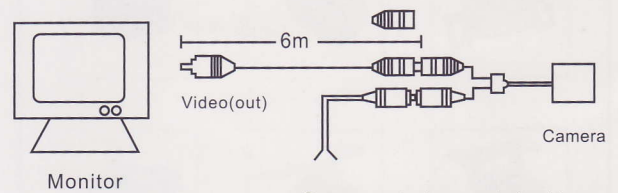

⊗ Yellow socket is connected to video
⊗ Power socket is connected to DC 12V

Mount the camera inside the keyhole of your vehicle. Adjust the lens of the camera to its best position. Connect Power cord (black) to your vehicle DV 12V Power system. Connect the video output(yellow) of the camera to the display in your vehicle.

III. Features

Uses with this item no more wonder what's going on in the back. Displays a reversed camera image on the monitor to duplicate the normal view seen in the rear view mirror. Perfect solution to get rid of that poor rear view visibility on your car, trailer, truck or any vehicle which has no rear view mirror or poor rear vision.

- ◆ Small compact size
- ◆ Low power consumption
- ◆ Low maintenance
- ◆ Easy and comprehensive installation
- ◆ Waterproof
- ◆ High sensitivity
- ◆ Night Vision Camera

※ If there being unmatched with the Instruction Manual, please refer to the actual performance of the camera concerned.

3