AC/DC 100W Enclosed Switching Power Supply MORNSUN® LM100-23Bxx, LM100-23Bxx-C, LM100-23Bxx-Q Series









EN62368-1 EN60335-1 EN61558-1

UL62368-1



BS FN 62368-1

FEATURES

- Universal 85 305VAC or 120 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating up to 5000m altitude

LM100-23Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, GB4943, EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide							
Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.	
	LM100-23B05	90	5V/18A	4.5-5.5	85	10000	
	LM100-23B12	102	12V/8.5A	10.2-13.8	86.5	6800	
LIL /EN/IEC/CCC	LM100-23B15	105	15V/7.0A	13.5-18	87	3300	
UL/EN/IEC/CCC	LM100-23B24	108	24V/4.5A	21.6-28.8	89.5	2200	
	LM100-23B36	100.8	36V/2.8A	32.4-39.6	89.5	1000	
_	LM100-23B48	110.4	48V/2.3A	43.2-52.8	90.5	470	
Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.							

Input Specification	S					
Item	Operating Condition	Operating Conditions			Max.	Unit
In 4 \ / a H a a D a a	AC input	AC input		_	305	VAC
Input Voltage Range	DC input	120		430	VDC	
Input Voltage Frequency			47		63	Hz
1	115VAC				3	
Input Current	230VAC				1.5	
	115VAC			35		A
Inrush Current	230VAC	Cold start		65		
Leakage Current	277VAC		< 0.75mA			
Hot Plug			Unav	ailable		

Output Specifications							
Item	Operating Conditions	Min.	Тур.	Max.	Unit		
Output Voltage Accuracy	Full la gral years are	5V	_	±2			
	Full load range 12V/15V/24V/36	12V/15V/24V/36V/48V	-	±1			
Line Regulation Rated load			-	±0.5		%	
Land Danidattan	omega	5V	-	±1			
Load Regulation		12V/15V/24V/36V/48V		±0.5			

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

AC/DC 100W Enclosed Switching Power Supply MORNSUN®

LM100-23Bxx, LM100-23Bxx-C, LM100-23Bxx-Q Series



		5V		100	-	
Output Ripple & Noise*	20MHz bandwidth	12V/15V		120		mV
	(peak-to-peak value)	24V		150		
		36V/48V	-	200	-	
Temperature Coefficient				±0.03		%/℃
Minimum Load			0	_	-	%
Stand-by Power	000)/4.0	5V/12V/15V/24V		_	0.3	W
Consumption	230VAC	36V/48V	_		0.5	
11.1.1	115VAC	_	10		ms	
Hold-up Time	230VAC	-	55			
Short Circuit Protection	Recovery time < 5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection			110%-160% lo, self-recovery			
	5V		≤7.5VDC (Output voltage turn off, hiccup or clamp)			
	12V	≤19.2VDC (Output voltage turn off, hiccup or clamp) ≤24VDC (Output voltage turn off, hiccup or clamp)				
	15V					
Over-voltage Protection	24V		≤38.4VDC (Output voltage turn off, hiccup or clamp)			turn off,
	36V		≤57.6VDC (Output voltage turn off, hiccup or clamp)			turn off,
	48V		60VDC (Output voltage turn off, hiccup or clamp)			

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

Hans		On availing Con differen			N Alm	Ti	Mane	l lm!4
Item		Operating Conditions			Min.	Тур.	Max.	Unit
Input - 🕀					2000			
<u> </u>	Input - output	Electric strength test for 1	4000			VAC		
	Output - 🖶		1250					
Input - 🕀					100			ΜΩ
Insulation	Input - output	At 500VDC	At 500VDC					
Resistance Output - (1)					100			
Operating Temperature					-30		+70	- °C
Storage Temperature					-40		+85	
Storage Humidity		Nice and denting			10		95	%RH
Operating H	lumidity	Non-condensing			20		90	76KH
Switching Fre	equency					65		kHz
		Operating temperature	5V output	+45 ℃ to +70 ℃	1.6			0/ 1%
Power Derat	ting	derating	Other output	+50°C to +70°C	2.0			%/ ℃
		Input voltage derating	85VAC-115VAC		0.67			%/VAC
Safety Standard					EN61558-1		3.1, EN6033 Proved & EN	
Safety Class					CLASSI			
MTBF					MIL-HDBK-	217F@25℃	>30.0000 h	

AC/DC 100W Enclosed Switching Power Supply MORNSUN®


LM100-23Bxx, LM100-23Bxx-C, LM100-23Bxx-Q Series




Mechanical Specifications							
Case Material	Metal (AL1100, SGC)	Metal (AL1100, SGCC)					
Dimension	129.00 x 97.00 x 30.00	129.00 x 97.00 x 30.00mm					
	325g (Typ.)	5V					
Weight	305g (Typ.)	12V/15V/24V/36V/48V					
Cooling Method	Free air convection						

Electromagnetic Compatibility (EMC)							
	CE	CISPR32/EN55032	32 CLASS B				
Emissions	RE	CISPR32/EN55032	CLASS B				
	Harmonic current	IEC/EN61000-3-2	CLASS A				
	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A			
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A			
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A			
Immunity	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A			
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A			
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B			


Product Characteristic Curve

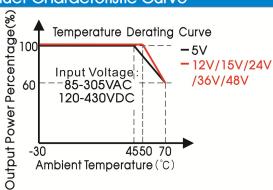




Note: 1. With an AC input voltage between 85-115 VAC and a DC input between 120-163 VDC the output power must be derated as per the temperature derating curves;

- 2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.
- 3. Product start at 50% output power under low temperature and low input voltage (-30°C, below 100VAC).

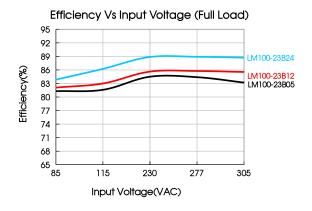

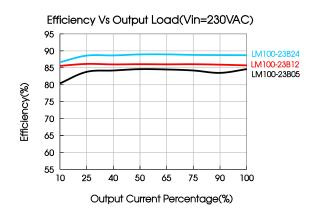


AC/DC 100W Enclosed Switching Power Supply MORNSUN®


LM100-23Bxx, LM100-23Bxx-C, LM100-23Bxx-Q Series


Dimensions and Recommended Layout


LM100-23Bxx, LM100-23Bxx-Q Series

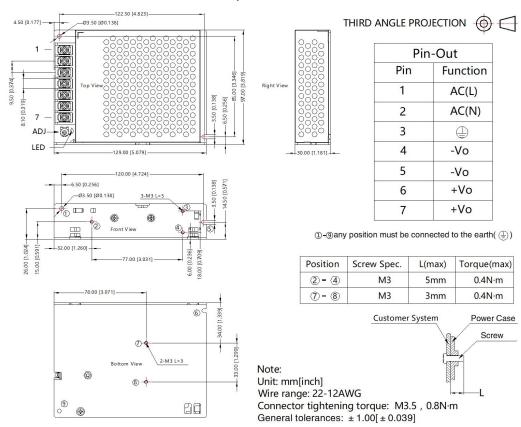

LM100-23Bxx-C Series

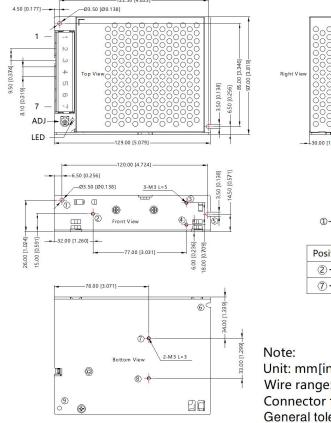





①-@any position must be connected to the earth()

Pin-Out

Function

AC(L)

AC(N)

-Vo

-Vo +Vo

+Vo

Screw

Pin

1

2

3

4

5

6

Position	Screw Spec.	L(max)	Torque(max)
2-4	M3	5mm	0.4N·m
7-8	M3	3mm	0.4N·m
	Power Case		

Unit: mm[inch]

Wire range: 22-12AWG

Connector tightening torque: M3.5, 0.8N·m

General tolerances: $\pm 1.00[\pm 0.039]$

AC/DC 100W Enclosed Switching Power Supply LM100-23Bxx, LM100-23Bxx-C, LM100-23Bxx-Q Series



Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220120;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- 5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. The out case needs to be connected to the earth of system when the terminal equipment in operating;
- 9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified
- 10. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850
Fax: 86-20-38601272
E-mail: info@mornsun.cn
www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.