
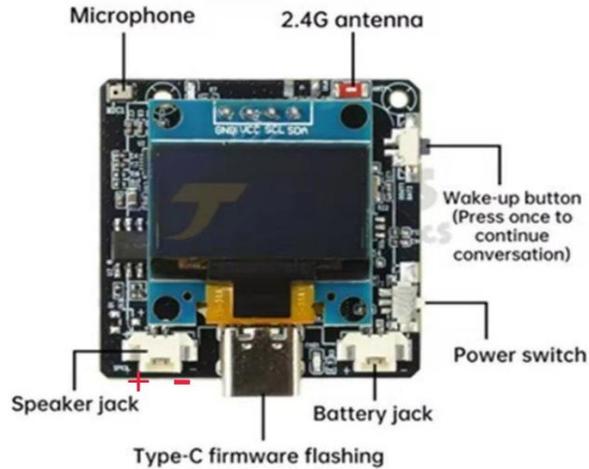


## Instruction Manual

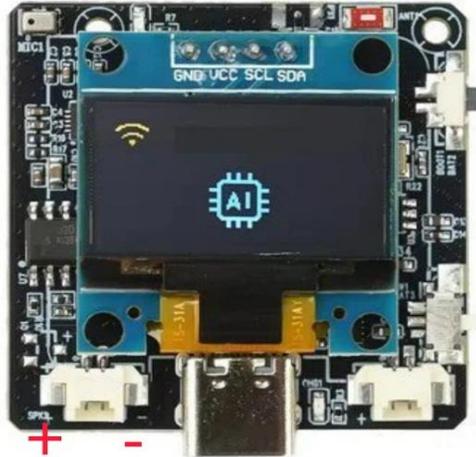


### Product Usage Method:

1. Connect the unit to power, then turn on the device.
2. Connect the device to your home WI-FI.
3. Then bind it to the background.

Press the wake-up key once after binding is completed. Wake-up via key or voice Wake-up word: "Hello Xiaozhi". Adjust the volume: Wake it up and say "Turn up the volume" or "Turn down the volume"

Note: The switch volume should be toggled gently (up and down). Do not use excessive force, otherwise it may break.


1. Press the wake-up key 3 times to enter Wi-Fi configuration. Go to Phone Settings - Wi-Fi – search for and find the model "Xiaozhi..." displayed on the screen to connect.

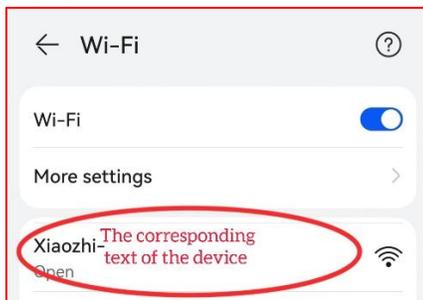

2. Switch the language to English before proceeding.



3. From the following options, find your home WIFI (name) and click to connect to the network.

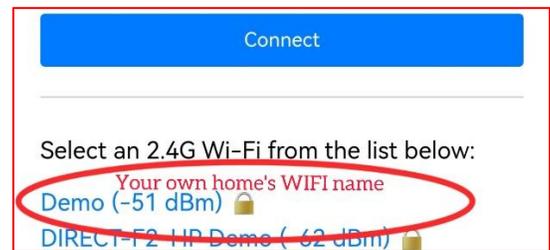


4. Click to enter the password and connect. Note: The network must be 2.4G; otherwise, the connection will fail!



5. If the above WIFI connection option does not pop up automatically, restart the device and then connect the device via WIFI

(Enter 192.168.4.1 in the browser)

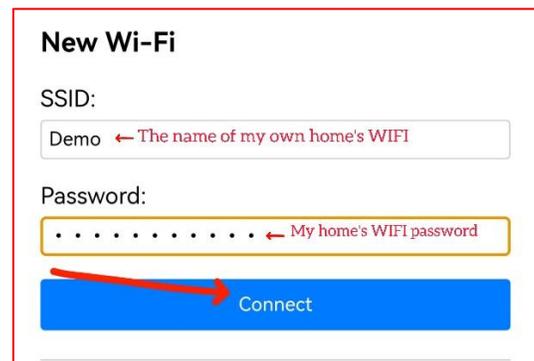

6. Scan the code to register an account or visit the website:

<https://xiaozhi.me>



Login

Phone Username


+86 Enter phone number

Enter the graphi... d a P U


The verification code You received

Send Code


Login

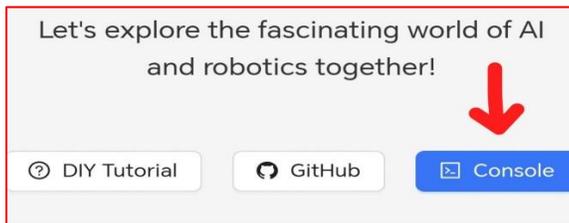

10. After successful addition, "Device (1)" will appear in the device list.

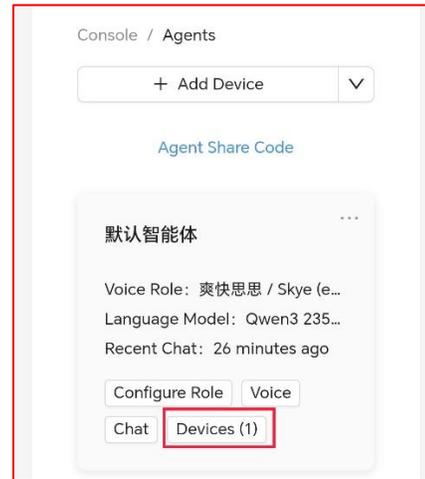

7. Create a new agent, click "Confirm". And add a device.

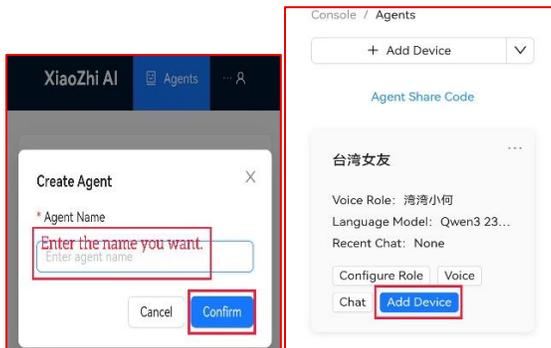

8. Enter the 6-digit verification code announced by the device and click "confirm" – the device will then be added successfully.

Add Device

\* Verification Code

Enter the 6-digit code announced by the device

Cancel Confirm

9. Configure the role in the background and enter the role settings.

Console / Agents / Configure Role

Configure Role 台湾女友

Role Template

台湾女友 土豆子

English Tutor 好奇小男孩

汪汪队长

Assistant Name

Enter assistant name

Dialogue Language

English

Voice Role

Skye (en-US)

Safety tips

1. Before using this device, please read all safety information first to ensure proper and safe usage.
2. Do not dispose the old batteries in the household dustbin. If they are not disposed properly, they may cause the battery to catch fire and explode.
3. Do not short-circuit the metal contacts of the battery, as they may cause short-circuit hazard.
4. Avoid overcharging the battery. Heat can cause personal injuries such as scalds and burns.
5. Do not use in a high-temperature environment, as overheating of the battery may cause an explosion.
6. Do not attempt to repair this product by yourself.

Function	Instructions
Wake-up Key	Press the wake-up key once when having a conversation.
On/Off Button	Flicking it upward turns it on, and flicking it downward turns it off.
Type-C Charging Port	The Type-C charging port is used to charge the battery and to power up the device.



Note: If you need to replace or return the BMT ESP32-C3 AI Voice Dev Board, you must unbind the device first. A device that is not unbound will not be eligible for replacement or refund. Additionally, no replacement or refund will be provided for devices that show physical damage, have burnt or blown components, or have been overcharged.