

POWER TRIPCONNECT

12-00759

CLEARLINE MULTI PLUG 4+4

Features

- Plug-and-Play concept
- Reduces inrush current
- High surge capability
- Built-in Delay
- Indication Lamp

Power protection devices used at home, office and work-place such as surge suppressors and stabilizers provide protection against power spikes that happens in milliseconds, mainly caused by lightning.

The **Power Tripconnect**[®] prevents damage from power surges and dips (brownouts) caused by power shutdowns and over- and under-voltages from unstable power. The duration of these conditions is normally longer and can be especially damaging to air conditioners, electric motors, etc., running under load, and expensive electronic equipment.


The **Power Tripconnect**[®] disconnects the power altogether when these conditions occur and remains off for 10 seconds giving the power feed time to stabilize.

The **Power Tripconnect**[®] is easy to use and LED indicators are provided.



Clearline's unit has multiple stages of protection capable of blocking severe lightning and power surges. The unit incorporates a fast overload and thermal device which will activate in extreme conditions. Functional indication lamp display the protection status of the

Specifications	
Phase	Single
Low voltage trip	180V
Low voltage connect	190V
Nominal voltage	230V
High voltage trip	260V
High voltage connect	250V
Connect delay	10 seconds
Power Module	
Nom. input voltage	230V 50Hz
Max. continuous current (Thermal protected)	16A
Max. discharge current at Ismax L-L (8/20)	4.5kA L-N, L-E, N-E
Residual voltage at Ismax L-L	900V (typ)
Response Time	<25ns
Power connectors	16A round pin
Standards compliance	IEC 950, ANSI C62.41, IEC 61643-1

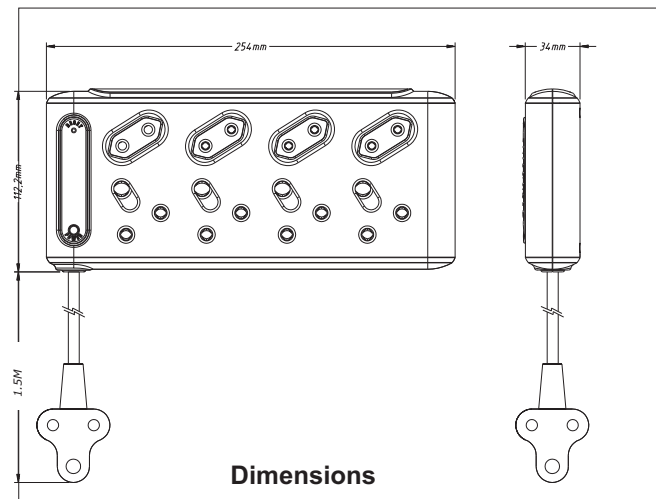

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
385 Roan Crescent Corporate Park North, Old Pta Road,
Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

