



SI-103 *Flood sensor Z-Wave Plus*

- Z-Wave Plus
- Flood detection
- Built-In Buzzer
- Lower power consumption
- AES 128 bit Z-wave encryption
- 1700mA CR123A lithium battery
- Tamper Proof Protection
- Low Battery indication



Protect your Kitchen

Kitchen sink's pipe and water filter are a dangerous source for water leak and flooding. With SI-103 installed. It will notify you when there is a leak through APP or the built-in buzzer. It really bring you a piece of mind.

Watch over Bath Room

How many times have you forgot to turn off the bathtub's faucet and cause a flood in your bathroom? With SI-103 installed, it will inform you with a loud buzzer when water is detected on the floor.






Z-Wave Plus Technology

Unlike traditional WiFi which is prone to interference and obstacle issues. The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving and uninterrupted connection for your smart home devices.

AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

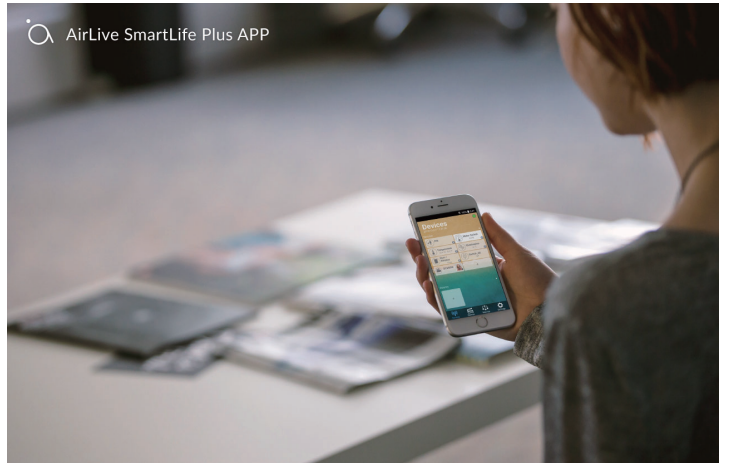

Specifications

Model	SI-103 Flood sensor Z-Wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M (Indoor)
Function	Flood Detection
Power	Built-in Battery (CR123A 1700 mA)
Cable Length	145 cm

Dimension and Environment

Dimensions	85(L) x 28(W) x 23(H) mm
Operation Temperature	-10 ~ 40° C
Operation Humidity	85% RH max

Ordering Information

Model	SI-103 Flood sensor Z-Wave Plus
-------	---------------------------------

Standard Package

Package Size	11.2 * 11.2 * 6.3 cm
Product Weight	0.079 kg
Package Weight	0.150 kg
Package Content	SI-103 * 1