


CMU BUCK/LIPO CHG 1.25-36V +DISP

Instructions

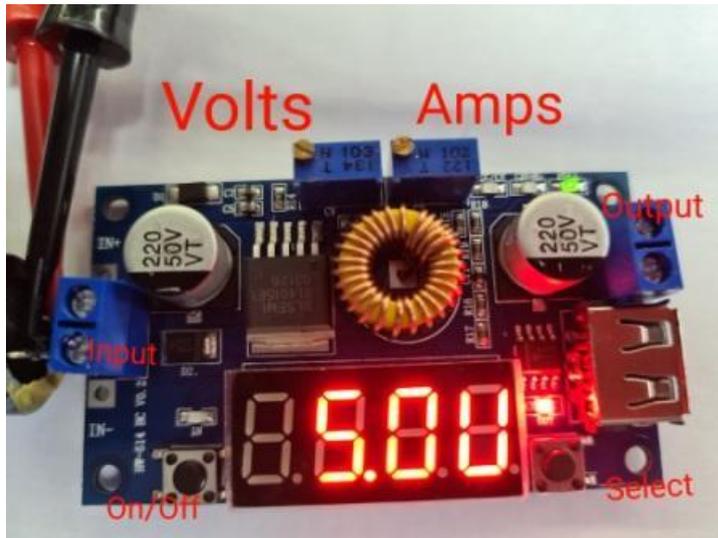

Voltage Setting: Anti Clockwise multi turn

Current Setting: Anti Clockwise multi turn

The unit I rested:

Connecting 12 volt dc to Input

1. No Digital display comes on
2. Green LED lights up
3. Press LEFT button once – Digital display turns on
4. Press RIGHT button to select readings
5. Left RED LED indicates INPUT- RIGHT RED LED indicates OUTPUT
6. Select OUTPUT voltage and set to 5 Volt Output [Turn Voltage POT several times anti clockwise before setting will take place]
7. Current POT -[Turn current(A) POT several times anti clockwise before setting will take place]
8. RED LED DC/CV will switch on to set the current {Amps} needed