




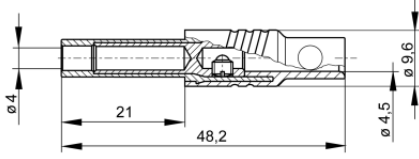


## Sockets

### KUN S



Product	KUN S
description	Safety coupling with screw connection for leads from 0.5mm <sup>2</sup> to 1.5mm <sup>2</sup> , outer diameter of lead max. 4,2mm Connectable with plugs 4mm and safety plugs 4mm 1000V-system, IEC 61010. Simple assembly by "Click-System".
article-no. / *colour	9340961xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> </div> <div style="text-align: right; margin-top: 5px;"><span style="border: 1px solid black; padding: 2px;">Ni</span></div>
drawing	
technical data	
connection	screw terminal
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current <sup>(1)</sup> (consider derating curve)	24 A
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-15 °C to +70 °C
inflammability class acc. to UL 94	V-2
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 13.05.2016