


| | | | | |
|--------------|---|-----------|---------------------|------------------------|
| Product Area | Male cable connector with solder eye, cable outlet 6-8 mm M16 connectors IP 40 | serie 581 | Pole Article number | 8 DIN 99 2061 02 08 |
|--------------|---|-----------|---------------------|------------------------|


illustration



scale drawing

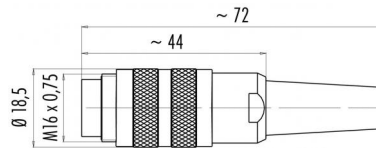

Contact Arrangement



| | X | Y |
|---|-------|-------|
| 1 | 3,50 | 0,00 |
| 2 | 0,00 | 3,50 |
| 3 | -3,50 | 0,00 |
| 4 | 2,47 | 2,47 |
| 5 | -2,47 | 2,47 |
| 6 | 2,47 | -2,47 |
| 7 | -2,47 | -2,47 |
| 8 | 0,00 | -0,70 |

You can find the item description on the next page.

Technical data

Common values

| | |
|--------------------------|----------------------|
| Connector Design | Male cable connector |
| Connector locking system | Screw-locking |
| Termination | solder |
| Wire gauge (mm) | 0,75 mm ² |
| Wire gauge (AWG) | 20 |
| Max. Cable outlet | 6 - 8 mm |
| Upper temperature | +85 °C |
| Lower temperature | -40 °C |

Material

| | |
|--------------------------|----------------------------|
| Material of contact | CuZn (brass) |
| Contact plating | Ag (silver) |
| Material of contact body | PBT (UL 94 V-0) |
| Material of housing | CUZn (brass nickel plated) |

Cable data

Contacts 8 DIN, male cable connector with solder eye ring, shieldable, cable outlet 6 - 8 mm, silver plated contacts

Electrical values

| | |
|-----------------------|--------------------|
| Rated voltage | 60 V |
| Rated impulse voltage | 500 V |
| Pollution degree | I |
| Overvoltage category | I |
| Material group | III |
| Rated current (40°C) | 5 A |
| Volume resistivity | ≤ 5 mΩ |
| EMV compliance | shielded |
| Degree of protection | IP 40 |
| Mechanical operation | >500 mating cycles |



Product Male cable connector with solder eye, cable outlet 6-8 mm
Area M16 connectors IP 40 serie 581

Pole 8 DIN
Article number 99 2061 02 08

Date: 2013-10-07 - Page 2 of 2

Item description

