



# PRODUCT DATA SHEET

Seal Coat® Clear Urethane Coating, 11 Wt Oz  
Part Number: 18411



Product Description	It provides a conformal polyurethane coating that insulates electrical equipment and seals out water and moisture. This product allows clear visualization of whatever it is sprayed upon. It is an excellent insulator of PC boards, since it allows visualization of circuit paths. It dries quickly to a hard, durable, flexible film.
Applications	On motor windings, terminals, bus bars, commutator ends, stator coils, and PC boards
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Urethane Coating
Net Fill	11 Wt Oz
UPC Code	078254184111
Unit Dimensions	8.1H x 8.3W x 11.1D in
Units Per Case	12
Case Dimensions	8.6H x 8.4W x 11.3D in
Cases Per Pallet	133
Case Weight	11 lbs
I 2 of 5 Code	30078254184112
Appearance	Clear Viscous Liquid
Flash point (F)	-4°F
Flash point (C)	-20°C
Flammability Class - CPSC	Extremely Flammable
Spec Gravity Concentrate	0.717
Plastic Safe	Yes
Evaporation Rate	Fast
Dry Time - Fully Dry	72 Hours
Dry Time - Tack Free	15 to 30 Minutes
Coverage	20 to 25 Sq Ft
Dielectric Strength	1,300 Volts/Mil

Last revised: 2/27/2017  
Page 1 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



# PRODUCT DATA SHEET



Working Temp (F)	-90 to 250°F
Working Temp (C)	-67.8 to 121.1°C
Propellant	Hydrocarbon
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Federal)	63.9
VOC g/L (Federal)	457.8
VOC Lbs./Gal. (Federal)	3.8
VOC Category	Aerosol Coating: Electrical Coating
MIR Limit (EPA)	None
MIR Limit (CA)	2.0
MIR Value	1.46
Removal (How To)	Extremely difficult to remove, scraping is recommended.

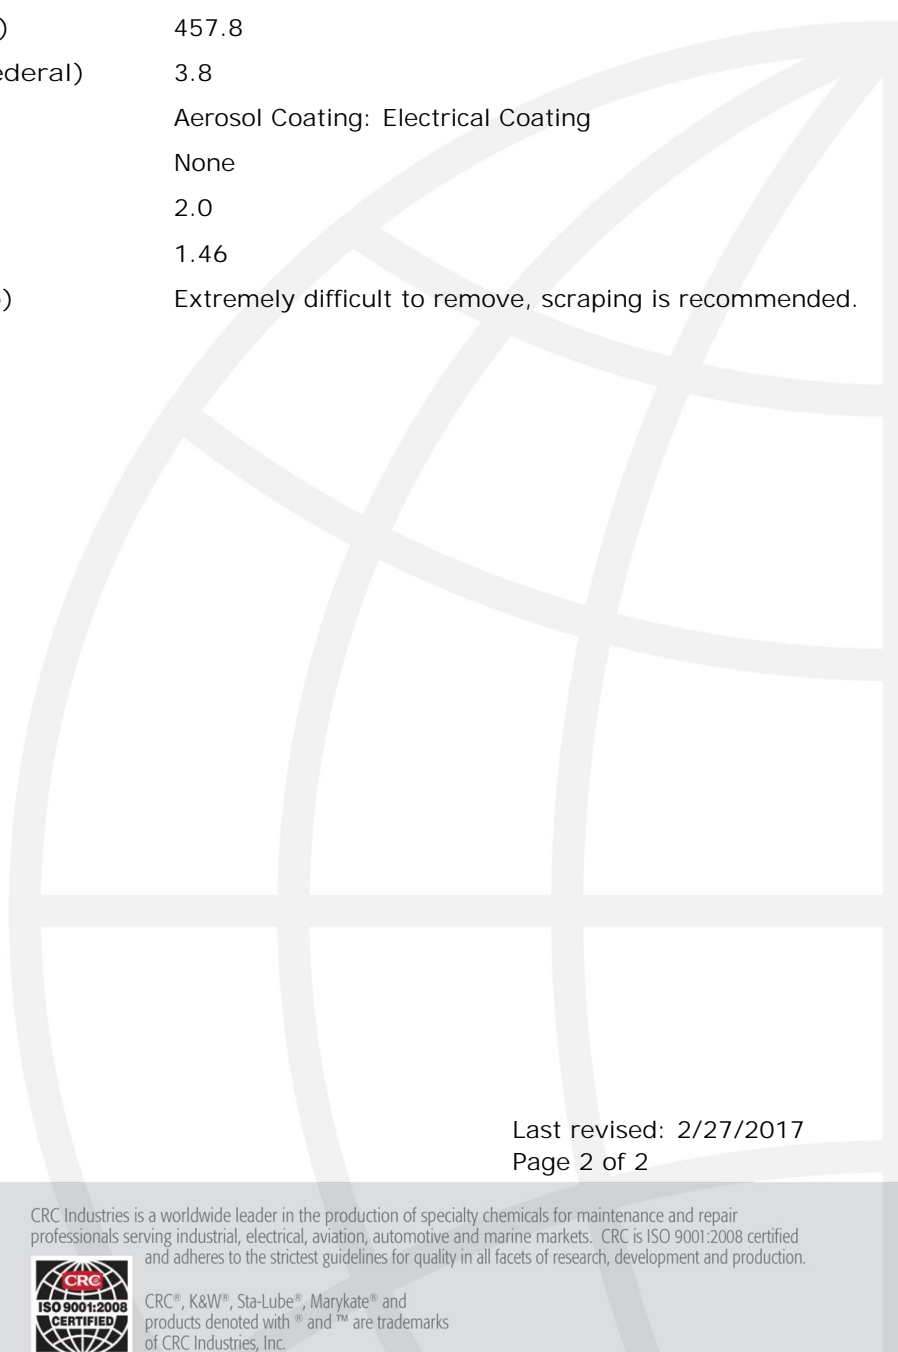

Last revised: 2/27/2017  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.